

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
28 August 2003 (28.08.2003)

PCT

(10) International Publication Number
WO 03/070365 A1

(51) International Patent Classification⁷: **B01J 19/18**,
19/24, C08F 2/01

(21) International Application Number: PCT/US02/04519

(22) International Filing Date: 19 February 2002 (19.02.2002)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant (for all designated States except US): **EXXON-MOBIL CHEMICAL PATENTS INC.** [US/US]; 5200 Bayway Drive, Baytown, TX 77520-2101 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **KENDRICK, James, A.** [US/US]; 10314 Sagefield Drive, Baton Rouge, LA 70818 (US). **TOWLES, Thomas, W.** [US/US]; 1902 Roseneath Drive, Baton Rouge, LA 70806 (US). **ROGER, Scott, T.** [US/US]; 3660 Westervelt Avenue, Baton Rouge, LA 70820 (US).

(74) Agents: **REID, Frank, E.** et al.; ExxonMobil Chemical Company, P.O. Box 2149, Baytown, TX 77522-2149 (US).

(81) Designated States (*national*): AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: CONTINUOUS SLURRY POLYMERIZATION PROCESS USING A LOOP REACTOR

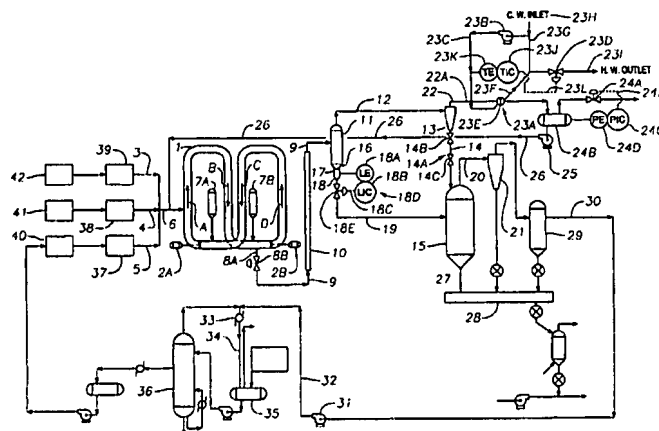

(57) Abstract: A process/apparatus is disclosed for continuously separating a liquid medium comprising diluent and unreacted monomers from a polymerization effluent comprising diluent, unreacted monomers and polymer solids, comprising a continuous discharge of the polymerization effluent from a slurry reactor through a discharge valve and transfer conduit into a first intermediate pressure flash tank with a conical bottom defined by substantially straight sides inclined at an angle to that of horizontal equal to or greater than the angle of slide of the slurry/polymer solids and an exit seal chamber of such diameter (d) and length (l) as to maintain a desired volume of concentrated polymer solids/slurry in the exit seal chamber such as to form a pressure seal while continuously discharging a plug flow of concentrated polymer solids/slurry bottom product of the first flash tank from the exit seal chamber through a seal chamber exit reducer with inclined sides defined by substantially straight sides inclined at angle to that of horizontal equal to or greater than the angle of slide of the polymer solids which remain after removal of about 50 to 100 % of the inert diluent therefrom to a second flash tank at a lower pressure.

WO 03/070365 A1

CONTINUOUS SLURRY POLYMERISATION PROCESS USING A LOOP REACTOR

5 **FIELD OF INVENTION**

The present invention relates to an apparatus for continuously separating polymer solids from a liquid medium comprising an inert diluent and unreacted monomers in a slurry polymerization process. In particular, the present invention relates to an apparatus for continuously separating polymer solids from a liquid medium, drying the polymer, and recovering the diluent and unreacted monomers with a reduction in compression needed for diluent vapor condensation to liquid diluent for reuse in the polymerization process. In another aspect, the invention relates to a method for continuously separating polymer solids from a liquid medium. In particular, the invention relates to a method for continuously separating polymer solids from a liquid medium, drying the polymer, and recovering the inert diluent and unreacted monomers for reuse in the polymerization process.

The present invention also relates to a process for producing polymer in a continuous slurry loop reactor comprising feeding catalyst, monomer, and, optionally, at least one of co-monomer, co-catalyst, diluent, polymer modifier, or mixtures thereof into the reactor; wherein catalyst is fed into the reactor from multiple catalyst inlets; and recovering polymer from the reactor.

The present invention also relates to a process for producing polymer in a continuous slurry loop reactor which comprises: reacting a monomer in a hydrocarbon diluent to form a polymerization slurry of polymer solids in a liquid medium; discharging a portion of the polymerization slurry as slurry effluent which comprises a slurry of discharged polymer solids in a discharged liquid medium through at least two discharge conduits; combining the effluent from at least two of the discharge conduits; flashing the combined effluent in a first flash to form a first flash vapor and a first flash slurry; and condensing at least a portion of the first flash vapor without compression.

The present invention also relates to a slurry loop reactor which comprises: multiple catalyst inlets; at least one feed inlet; at least one discharge conduit; and at least one circulator in the reactor; wherein the catalyst inlets are located within 45% of the points of symmetry of the loop reactor.

5

BACKGROUND OF THE INVENTION

In many polymerization processes for the production of polymer, a polymerization effluent is formed which is a slurry of particulate polymer solids suspended in a liquid medium, ordinarily the reaction diluent and unreacted monomers. A typical example of such processes is disclosed in Hogan and Bank's U.S. Pat. No. 2,285,721, the disclosure of which is incorporated herein by reference. While the polymerization processes described in the Hogan document employs a catalyst comprising chromium oxide and a support, the present invention is applicable to any process producing an effluent comprising a slurry of particulate polymer solids suspended in a liquid medium comprising a diluent and unreacted monomer. Such reaction processes include those which have come to be known in the art as particle form polymerizations.

In most commercial scale operations, it is desirable to separate the polymer and the liquid medium comprising an inert diluent and unreacted monomers in such a manner that the liquid medium is not exposed to contamination so that the liquid medium can be recycled to the polymerization zone with minimal if any purification. A particularly favored technique that has been used heretofore is that disclosed in the Scoggin et al, U.S. Pat. No. 3,152,872, more particularly the embodiment illustrated in conjunction with Fig. 2 of that patent. In such processes the reaction diluent, dissolved monomers, and catalyst are circulated in a loop reactor wherein the pressure of the polymerization reaction is about 100 to 700 psia. The produced solid polymer is also circulated in the reactor. A slurry of polymer and the liquid medium is collected in one or more settling legs of the slurry loop reactor from which the slurry is periodically discharged to a flash chamber wherein the mixture is flashed to a low pressure such as about 20 psia. While the flashing results in substantially complete removal of the liquid medium from the polymer, it is necessary to recompress the vaporized polymerization

diluent (i.e., isobutane) in order to condense the recovered diluent to a liquid form suitable for recycling as liquid diluent to the polymerization zone. The cost of compression equipment and the utilities required for its operation often amounts to a significant portion of the expense involved in producing polymer.

5 Some polymerization processes distill the liquified diluent prior to recycling to the reactor. The purpose of distillation is removal of monomers and light-end contaminants. The distilled liquid diluent is then passed through a treater bed to remove catalyst poisons and then on to the reactor. The equipment and utilities costs for distillation and treatment can be a significant portion of the
10 cost of producing the polymer.

 In a commercial scale operation, it is desirable to liquify the diluent vapors at minimum cost. One such technique used heretofore is disclosed in Hanson and Sherk's U.S. Pat. No. 4,424,341 in which an intermediate pressure flash step removes a significant portion of the diluent at such a temperature and at such a
15 pressure that this flashed portion of diluent may be liquified by heat exchange instead of by a more costly compression procedure.

BRIEF SUMMARY OF THE INVENTION

 The present invention relates to a process for producing polymer in a
20 continuous slurry loop reactor comprising feeding catalyst, monomer, and, optionally, at least one of co-monomer, co-catalyst, diluent, polymer modifier, or mixtures thereof into the reactor; wherein catalyst is fed into the reactor from multiple catalyst inlets; and recovering polymer from the reactor.

 In one embodiment in accordance with the present invention, the process
25 also comprises at least one feed inlet for at least one of monomer, co-monomer, co-catalyst, diluent, polymer modifier, process additive, or mixtures thereof. Preferably, the process comprises multiple feed inlets.

 In another embodiment in accordance with the invention, the process also comprises at least one circulator in the reactor. Preferably, the at least one
30 circulator comprises a pump. Also preferably, the at least one circulator comprises a motor driven device to increase the pressure of the circulating slurry in the loop reactor.

In one embodiment in accordance with the invention, at least one of the catalyst inlets is located at the suction end of at least one circulator. In another embodiment in accordance with the present invention, at least one feed inlet is located at the discharge end of at least one circulator. Preferably, at least one catalyst inlet and at least one feed inlet are located at the suction end and discharge end, respectively, of the same circulator.

Generally, the catalyst inlets are located within 45% of the points of symmetry of the loop reactor. Preferably, the catalyst inlets are located within 25% of the points of symmetry of the loop reactor. More preferably, the catalyst inlets are located within 10% of the points of symmetry of the loop reactor. Most preferably, the catalyst inlets are located at the points of symmetry of the loop reactor.

Generally, the circulators are located within 45% of the points of symmetry of the loop reactor. Preferably, the circulators are located within 25% of the points of symmetry of the loop reactor. More preferably, the circulators are located within 10% of the points of symmetry of the loop reactor. Most preferably, the circulators are located at the points of symmetry of the loop reactor.

Also generally, the feed inlets are located within 45% of the points of symmetry of the loop reactor. Preferably, the feed inlets are located within 25% of the points of symmetry of the loop reactor. More preferably, the feed inlets are located within 10% of the points of symmetry of the loop reactor. Most preferably, the feed inlets are located at the points of symmetry of the loop reactor.

In accordance with another embodiment in accordance with the present invention, the loop reactor has a length of at least 750 feet, preferably at least 1,000 feet, and more preferably at least 1,400 feet. In yet another embodiment in accordance with the present invention, the loop reactor has at least 6 legs, preferably at least 8 legs, and more preferably at least 12 legs. In yet another embodiment in accordance with the present invention, the loop reactor has a volume of at least 10,000 gallons, preferably at least 20,000 gallons, more preferably at least 35,000 gallons, and most preferably at least 40,000 gallons.

In one embodiment in accordance with the present invention, the difference of the reactant monomer concentrations, measured in wt. %, taken at any two points along the loop reactor, is within 20% of the higher value. In a preferred embodiment, the difference of the reactant monomer concentrations, measured in wt. %, taken at any two points along the loop reactor, is within 10% of the higher value. In yet a more preferred embodiment, the difference of the reactant monomer concentrations, measured in wt. %, taken at any two points along the loop reactor, is within 5% of the higher value.

The present invention also relates to a process for producing polymer in a continuous slurry loop reactor which comprises: reacting a monomer in a hydrocarbon diluent to form a polymerization slurry of polymer solids in a liquid medium; discharging a portion of the polymerization slurry as slurry effluent which comprises a slurry of discharged polymer solids in a discharged liquid medium through at least two discharge conduits; combining the effluent from at least two of the discharge conduits; flashing the combined effluent in a first flash to form a first flash vapor and a first flash slurry; and condensing at least a portion of the first flash vapor without compression.

In one embodiment in accordance with the present invention, the discharge of slurry effluent through at least one discharge conduit is continuous. Preferably, the discharge of slurry effluent through at least two discharge conduits is continuous. Also preferably, the effluent from all discharge conduits is combined into a single transfer conduit.

In another embodiment in accordance with the present invention, the discharge conduits are located within 45% of the points of symmetry of the loop reactor. Preferably, the discharge conduits are located within 25% of the points of symmetry of the loop reactor. More preferably, the discharge conduits are located within 10% of the points of symmetry of the loop reactor. Most preferably, the discharge conduits are located at the points of symmetry of the loop reactor.

In yet another embodiment in accordance with the present invention, at least one discharge conduit is located in a bottom run of the loop reactor. Preferably, the bottom run is a 180° bend. Also preferably, the discharge conduit is located within 45° of the center of the 180° bend. More preferably, the

discharge conduit is located within 25° of the center of the 180° bend. Even more preferably, the discharge conduit is located within 10° of the center of the 180° bend. Most preferably, the discharge is located at the center of the 180° bend.

5 The present invention also relates to an apparatus for continuously separating polymer solids from a liquid medium comprising an inert diluent and unreacted monomers. In another aspect, the invention relates to an apparatus for continuously separating polymer solids from a liquid medium, drying the polymer, and recovering the diluent and unreacted monomers with a reduction in compression needed for diluent vapor condensation to liquid diluent for reuse in a
10 polymerization process. In another aspect, the invention relates to a method for continuously separating polymer solids from a liquid medium. In another aspect, the invention relates to a method for continuously separating polymer solids from a liquid medium, drying the polymer, and recovering the inert diluent and unreacted monomers for reuse in a polymerization process.

15 Also, in accordance with the present invention, there is provided an apparatus for continuously recovering polymer solids from a polymerization effluent comprising a slurry of the polymer solids in a liquid medium comprising an inert diluent and unreacted monomers. The apparatus comprises a discharge valve on a slurry reactor, examples of which include slurry loop reactors and
20 stirred tank slurry reactors, for the continuous discharge of a portion of the slurry reactor contents into a first transfer conduit: a first flash tank having a bottom defined by substantially straight sides inclined at an angle to the horizontal equal to or greater than the angle of slide of the slurry/polymer solids; wherein the pressure of the first flash tank and temperature of the polymerization effluent are such that from about 50% to about 100% of the liquid medium will be vaporized
25 and the inert diluent component of the vapor is condensable, without compression, by heat exchange with a fluid having a temperature in the range of about 65° F to about 135° F; a first flash tank exit seal chamber, communicating with the first flash tank, of such a length (l) and diameter (d) as to permit such a level of concentrated polymer solids/slurry to accumulate and form a pressure seal in the
30 first flash tank exit seal chamber: a seal chamber exit reducer providing for a continuous discharge of a plug flow of concentrated polymer solids/slurry to a

second transfer conduit which communicates the concentrated polymer solids/slurry into a second flash tank wherein the pressure of the second flash tank and temperature of the concentrated polymer solids/slurry are such that essentially all of any remaining inert diluent and/or unreacted monomer will be vaporized and removed overhead for condensation by compression and heat exchange and the polymer solids are discharged from the bottom of the second flash tank for additional processing or storage.

The invention provides also a method for the continuous removal of a stream of polymerization effluent from a slurry reactor through a discharge valve; increasing the heat content of the polymerization effluent during its transit through the first transfer conduit to a temperature below the fusion point of the polymer while continuously communicating the polymerization effluent to a first flash tank having a bottom defined by substantially straight sides inclined at an angle to the horizontal equal to or greater than the angle of slide of the concentrated polymer solids/slurry; continuously vaporizing from about 50% to about 100% of the liquid medium in the first heated flash tank to yield a concentrated polymer solids/slurry and a vapor stream at such a temperature and pressure that the inert diluent content of the vapor is condensable, without compression, by heat exchange with a fluid having a temperature in the range from about 65° F to about 135° F; continuously discharging the concentrated polymer solids/slurry from the first flash tank to a first flash tank exit seal chamber of such a length (l) and diameter (d) that a volume of concentrated polymer solids/slurry is continuously maintained so as to form a pressure seal in the first flash tank exit seal chamber; continuously discharging the concentrated polymer solids/slurry from the first flash tank seal chamber through a seal chamber exit reducer defined by substantially straight sides inclined at an angle to that of horizontal equal to or greater than the angle of slide of the polymer solids which remain after removal of about 50 to 100% of the inert diluent therefrom; communicating a continuous plug flow of concentrated polymer solids/slurry from the first flash tank exit seal chamber through the seal chamber exit reducer to a second transfer conduit which communicates the continuous plug flow of concentrated polymer solids/slurry to a second flash tank; and continuously vaporizing essentially all of any remaining

inert diluent and/or unreacted monomer in a second flash tank operated at a lower pressure than the first flash tank; condensing the vaporized inert diluent and/or unreacted monomer from the second flash tank by compression and heat exchange; and continuously discharging the essentially dried polymer slurry from
5 the second flash tank for further processing or storage.

The present invention also relates to an apparatus for capturing a higher weight percentage of polymer solids from a circulating slurry in a loop reactor than the weight percentage of solids in the circulating slurry. The apparatus includes a conduit having a first end, wherein the first end extends for a distance
10 into the loop reactor. The conduit also has portions defining an opening wherein the opening is positioned relative to the direction of the circulating slurry. Desirably, the opening may be facing the direction of flow of the circulating slurry. Additionally, a portion of the conduit may extend outwardly from the loop reactor for discharging, continuously or otherwise the polymer solids from the
15 loop reactor.

The present invention also provides a process for capturing a higher weight percentage of polymer solids from a circulating slurry in a loop reactor than the weight percentage of polymer solids in the circulating slurry. This process includes the step of extending for a distance into a the loop reactor a
20 conduit having portions defining an opening wherein the opening is extends into the circulating slurry. Additionally, this process may include the step of discharging, continuous or otherwise, the polymer solids from the loop reactor through a portion of the conduit extending outwardly from the loop reactor.

Of course, the invention can also include various combinations of the
25 embodiments disclosed herein.

The present invention also provides an apparatus for purging polymer solids from a conduit connected to a loop reactor and in fluid communication with the loop reactor. This apparatus includes a sensor, a first valve in fluid communication with the conduit, a second valve positioned between a first inert
30 diluent and the conduit, wherein the first inert diluent is in fluid communication with the conduit between the loop reactor and the first valve. In response to a signal produced by the sensor, the first valve is closed and the second valve is

opened allowing the first inert diluent to enter the conduit in sufficient quantities and under sufficient pressure to purge polymer solids from the conduit. This apparatus may further include a third valve positioned between a second inert diluent and the conduit, wherein the second inert diluent is in fluid communication with the conduit between the loop reactor and the first valve. In this way, when the first valve is open and the second valve is closed the third valve is opened allowing the second inert diluent to enter the conduit.

The present invention also provides a process for purging polymer solids from a conduit connected to a loop reactor and in fluid communication with the loop reactor comprising. This process includes the steps of (i) closing a first valve in response to a first signal from a first sensor, wherein the first valve is connected to and in fluid communication with the conduit, (2) opening a second valve in response to a second signal from a second sensor, wherein the second valve is fluid communication between a first inert diluent and the conduit, and wherein the first inert diluent is in fluid communication with the conduit between the loop reactor and the first valve, and (3) flowing sufficient quantities of the first inert diluent under sufficient pressure into the conduit to purge polymer solids from the conduit. In this process the first and second sensors may be a common sensor and the first and second signal may be a common signal.

The present invention also provides an apparatus for returning fines to a polymerization slurry in a loop reactor. The apparatus includes a discharge valve for discharging a portion of the polymerization slurry from the loop reactor into a first transfer conduit. The first transfer conduit communicates the polymerization slurry into a first flash tank. The first flash tank converts a portion of the polymerization slurry into a first fluid, such as a vapor. The first fluid includes a portion of the diluent and the fines from the polymerization slurry. A second transfer conduit communicates the first fluid to a first cyclone. The first cyclone converts a portion of the first fluid into a second fluid, such as a vapor. The second fluid includes a portion of the diluent and the fines. A third transfer conduit communicates the second fluid into a heat exchanger. The heat exchanger converts the second fluid into a liquid comprising the diluent and the fines. A fourth transfer conduit returns the liquid to the polymerization slurry in the loop

reactor. This apparatus may also include a first transfer conduit heater for heat exchange between the first transfer conduit heater and the polymerization slurry.

The present invention also provides a process for returning fines to a polymerization slurry in a loop reactor. The process includes (i) discharging a portion of the polymerization slurry from the loop reactor, (ii) communicating the discharge polymerization slurry into a first flash tank, (iii) converting in the flash tank a portion of the polymerization slurry into a first fluid, the first fluid comprising a diluent and the fines, (iv) communicating the first fluid from the first flash tank to a first cyclone, (v) converting in the cyclone a portion of the first fluid into a second fluid comprising the diluent and the fines, (vi) communicating the second fluid into a heat exchanger, (vii) converting in the heat exchanger the second fluid into a liquid comprising the diluent and the fines, and (viii) returning the liquid to the polymerization slurry in the loop reactor.

The present invention further provides an apparatus and process for producing polymer from a polymerization slurry in a loop reactor operating at a space time yield greater than 2.8 lbs/hr-gal. In this instance, the polymer is formed in the polymerization slurry which includes a liquid medium and solids. The polymerization slurry is discharged into a first transfer conduit. The polymerization slurry is referred to as a polymerization effluent upon leaving the loop reactor. The polymerization effluent is heated in the first transfer conduit to a temperature below the fusion temperature of the polymer solids. The heated polymerization effluent is communicated through the first transfer conduit to a first flash tank. In the first flash tank, from about 50% to about 100% of the liquid medium is vaporized. The vapor is condensed by heat exchange. Polymer solids are discharge from the first flash tank to a second flash tank through a seal chamber of sufficient dimension such as to maintain a volume of polymer solids in the seal chamber sufficient to maintain a pressure seal. The polymer solids are then communicated to a second flash tank. In the second flash tank, the polymer solids are exposed to a pressure reduction from a higher pressure in the first flash tank to a lower pressure in the second flash. The polymer solids are then discharging from the second flash tank. Additionally, the weight percent of solids in the polymerization slurry may be greater than 47. The loop reactor may be

-11-

operated at a total recirculating pumping head/reactor distance of greater than 0.15 ft/ft. The loop reactor may also be operated with a recirculating pumping head greater than or equal to 200 ft. and have more than eight vertical legs, desirably between 10 and 16 vertical legs, more desirably between 10 and 12 vertical legs, most desirably 12 vertical legs. The volume of polymerization slurry in the loop reactor may be greater than 20,000 gallon.

An object of the present invention is to provide both an apparatus and method for the continuous two stage flash drying of the polymer solids following the continuous removal of the polymerization effluent comprising polymer solids and liquid medium comprising inert diluent and unreacted monomers from a slurry reactor through a point discharge valve, a continuous solids level control in the first flash tank exit seal chamber that provides a pressure seal therein which enables the first flash tank to operate under a substantially greater pressure than the second flash tank while polymer solids are continuously discharged through the seal chamber exit reducer into the second transfer conduit and further into the second flash tank which eliminates plugging in the first flash tank and the continuous liquification of from about 50% to about 100% of the inert diluent vapor by heat exchange rather than compression.

Another object of the invention is to eliminate the need for a settling leg on the slurry reactor and the intermittent high pressure pulse in the slurry reactor caused by periodic discharging of the contents of the settling leg. Another object of the present invention is to improve safety by eliminating the possibility of plugging in a settling leg.

Another object of the invention is to eliminate plugging in equipment downstream from the discharge valve. In a settling leg of a polymerization reactor polymerization continues and the heat of reaction further heats the liquid medium and a potential exists for some of the polymer solids to dissolve or to fuse together. As the contents of the settling leg exit the discharge valve, the pressure drop causes flashing of some of the liquid medium which results in cooling the remaining liquid medium causing the dissolved polymer to precipitate which tends to plug downstream equipment. The present invention which eliminates the need

for a settling leg also eliminates this potential for downstream equipment plugging by avoiding the initial dissolution or fusion of the polymer solids.

Another object of the present invention is to increase the reactor throughput by the use of continuous discharge and increased ethylene concentrations in the liquid medium, e.g., greater than or equal to 4 weight percent at reactor outlet, desirably from 4 weight percent to 8 weight percent, still more desirably from 5 weight percent to 7 weight percent. Settling legs limit ethylene concentrations due to an increased tendency to plug downstream equipment caused by accelerated reaction within the settling leg. A continuous polymerization effluent slurry flow allows ethylene concentrations to be limited only by the ethylene solubility in the liquid diluent in the reactor, thereby increasing the specific reaction rate for polymerization and increasing reactor throughput.

Another object of the present invention is to increase the weight percent (wt %) of polymer solids in the polymerization slurry circulating in the polymerization zone in the loop reactor. Desirably, the wt % of polymer solids in the polymerization slurry is greater than 45, more desirably, from 45 to 65, still more desirably from 50 to 65, and most desirably from 55 to 65.

Another object of the present invention is to increase the space time yield (STY), expressed in terms of pounds per hour-gallon (lbs/hr-gal). Desirably, the STY is greater than 2.6, more desirably from 2.6 to 4.0, and most desirably from 3.3 to 4.0.

Other aspects, objects, and advantages of the present invention will be apparent from the following disclosure and Figures 1 and 2.

The claimed apparatus and process provide several advantages over the prior art including: (1) allowing for a continuous processing of the contents of a slurry reactor from the point of discharge of the polymerization slurry effluent through a discharge valve; a first flash tank; a seal chamber; a seal chamber exit reducer; and therefrom to a second flash tank, (2) significantly increasing ethylene concentration in the loop reactor liquid medium thereby increasing reactor throughput, (3) significantly increasing the wt % of polymer solids in the polymerization slurry, (4) significantly increasing reactor space time yield and (5) energy consumption is reduced by reducing the need to compress and/or distill the

reactor vapor-liquid effluent. Recycling compressors and other downstream equipment can be reduced in size or eliminated.

BRIEF DESCRIPTION OF THE DRAWINGS

5 Figs. 1 and 2 are a schematic diagram illustrating an apparatus for continuously separating polymer solids from diluent and unreacted monomer in accordance with the present invention.

Fig. 3 is an enlarged, cross sectional view of the discharge conduit with opening extending a distance into the loop reactor and the circulating
10 polymerization slurry.

Fig. 4 is a schematic view of a pressure control system.

Fig. 5 is a schematic view of a loop reactor with multiple catalyst inlets, feed inlets, circulators, and discharge conduits.

Fig. 6 is a schematic illustrating an example of "points of symmetry" for
15 three feed inlets.

Fig. 7 is a schematic illustrating one type of the bottom runs of the loop reactor.

DETAILED DESCRIPTION OF THE INVENTION

20 As used herein, the term "polymerization slurry" means substantially a two phase composition including polymer solids and liquid circulating within the loop reactor. The solids include catalyst and a polymerized olefin, such as polyethylene. The liquids include an inert diluent, such as isobutane, with dissolved monomer, comonomer, molecular weight control agents, such as
25 hydrogen, antistatic agents, antifouling agents, scavengers, and other process additives.

As used herein, the term "space time yield" (STY) means the production rate of polymer per unit of loop reactor volume or polymerization slurry volume.

As used herein, the term "catalyst productivity" means weight of polymer
30 produced per weight of catalyst introduced into the loop reactor.

As used herein, the term "polymer residence time" means the average duration that a polymer particle remains within the loop reactor.

As used herein, the term "multiple" means more than one.

As used herein, the term "constant reaction kinetics" means the monomer concentrations, wt.%, taken at any two points along the loop reactor, to be within 20% of the higher value.

5 As used herein, "points of symmetry" means points that are equidistant along the entire length of the loop reactor. For example, for a loop reactor that is 1200 feet long, two points of symmetry would be spaced 600 feet apart, three points of symmetry would be spaced 400 feet apart, four points of symmetry would be located 300 feet apart, etc. By way of non-limiting example, three
10 catalyst inlets located at the points of symmetry of the reactor would be located 400 feet apart for a 1200 foot reactor. Further by way of non-limiting example, for a 1200 foot reactor, three feed inlets located within 25% of their points of symmetry would each be located within 25% of the 400 foot points of symmetry
15 or from 300 to 500 feet apart, it being understood that one or more of these elements will not be equidistant from the others. For example, for a 1200 foot loop reactor having three catalyst inlets, it would be within the scope of the present invention for a first and second catalyst inlet to be 400 feet apart, with the third inlet spaced 300 feet from the second catalyst inlet and 500 feet from the first.

As used herein, the term "flash slurry" means polymer solids containing
20 entrained (absorbed) liquid medium and entrained flash vapor (if any) and/or such polymer solids slurried in "free-flowing" liquid medium.

The present invention is applicable to any mixture which comprises a slurry of polymer solids and a liquid medium comprising an inert diluent and unreacted polymerizable monomers including slurries resulting from olefin
25 polymerization. The olefin monomers generally employed in such reactions desirably include 1-olefins having from 2 up to 8 carbon atoms per molecule. Typical examples include ethylene, propylene, butene, pentene, hexene and octene. Other examples include vinyl aromatic monomers, like styrene and alkyl-substituted styrene, geminally distributed monomers such as isobutylene and
30 cyclic olefins, such as norbornene and vinyl norbornene. Typical diluents employed in such olefin polymerizations include saturated aliphatic hydrocarbons having 3 to 8, preferably 3 to 4 carbon atoms per molecule, such as propane,

isobutane, propylene, n-butane, n-pentane, isopentane, n-hexane, isooctane, and the like. Of these diluents those of 3 to 4 carbon atoms per molecule are preferred, and isobutane is most preferred.

According to one embodiment in accordance with the present invention,
5 the rate of discharge of the polymerization effluent is such as to allow a continuous process stream from the slurry loop reactor from the point of discharge of the liquified polymerization effluent through a single point discharge valve and also through the first flash tank and the associated vapor recovery and solids recovery systems. The rate of discharge of the polymerization effluent is such as
10 to maintain a constant pressure in the slurry reactor and to eliminate intermittent high pressure pulses associated with a discharge of a portion of the reactor contents that occurs with settling legs on slurry reactors.

The temperature to which the polymerization effluent which is discharged from the reactor is heated during transit to the first flash tank for vaporization is
15 below the fusion temperature of the polymer. This may be accomplished by appropriate heating of this first transfer conduit. The quantity of heat to be supplied to the polymerization effluent during its transit through this first conduit to the first flash tank should preferably be at least equal to that quantity of heat which equals the heat of vaporization of that quantity of inert diluent which is to
20 be flash vaporized in the first flash tank. This then will provide for the concentrated polymer solids formed in the first flash tank to be passed to the second flash tank to pass thereto at a higher solids temperature and thus facilitates the removal of residual diluent in the pores of such polymer solids by the operation of the second flash tank. That quantity of heat transferred to the
25 polymerization effluent during its transit through the first transfer conduit to the first flash tank may even be greater, provided only that the quantity of heat so transferred will not cause the polymer solids therein to become heated to such a temperature at which they will tend to fuse or agglomerate one with another.

The concentrated polymer solids/slurry are discharged from the first flash
30 tank into a first flash tank exit seal chamber of such a length (l) and diameter (d) so as to provide a volume sufficient to maintain a volume of concentrated polymer solids/slurry sufficient to maintain a pressure seal in the exit seal chamber. The

concentrated polymer solids/slurry are discharged from the exit seal chamber through an exit seal chamber reducer to a second transfer conduit which communicates the concentrated polymer solids/slurry as a plug flow to a second flash tank. The exit seal chamber reducer is defined by substantially straight sides inclined at an angle to that of horizontal equal to or greater than the angle of slide
5 of the concentrated polymer solids/slurry.

The pressure for the first flash step will vary depending on the nature of the diluent and unreacted monomers and the temperature of the polymerization effluent. Typically, pressures in the range of from about 140 psia to about 315 psia can be employed; more preferably from about 200 psia to about 270 psia; and
10 most preferably from about 225 psia to about 250 psia.

The heat exchanging fluid used to condense the vapor from the first flash step is at a temperature in the range of from about 65° F to about 150° F. A preferred embodiment uses a heat exchange fluid at a temperature of from about 75° F to about 140° F. A most preferred embodiment uses a heat exchange fluid at
15 a temperature of from about 85° F to about 130° F.

Maintaining constant reaction kinetics is desirable when a large loop reactor is used. In a large loop reactor, the concentrations of the reactants, such as un-reacted monomers, are high at and just downstream of the feeding inlet. The concentrations of these reactants decrease along the loop length as the reaction
20 goes on. This phenomenon creates reactant concentration gradients along the loop, which can result in lower production yield, final product quality problems, and reactor control difficulties. It is, accordingly, desirable to reduce these concentration gradients by using multiple feed inlets for the reactants. For similar reasons, it is desirable to have even distribution of catalyst, co-catalyst, polymer
25 modifiers, and/or process additives by using multiple inlets therefor.

“Constant reaction kinetics” is defined herein as the difference of reactant monomer concentrations, measured in wt. %, taken at any two points along the loop reactor, to be within 20% of the higher value. As a non-limiting example
30 illustrated in Fig. 5, two samples are taken from two sampling ports 505, 506 at the same time during the reaction and are analyzed for the concentrations of un-reacted ethylene. Two values are obtained: 4.0 wt. % and 3.5 wt.%. Therefore

the difference of the two values is 0.5 wt. % and it is within the 20% of the higher value (20% of 4.0 wt.%). This indicates that the loop reactor has "constant reaction kinetics." The locations of the two sampling ports 505, 506 can be anywhere along the loop reactor. The method used for concentration analysis can be any known method as long as the same method is used for analyzing both samples.

One aspect of the present process is to produce polymer in a large continuous slurry loop reactor with catalyst fed into the loop reactor from multiple catalyst inlets, by way of non-limiting illustration, at 502A, 502B, 502C, 502D. Preferably, the process comprises at least one, preferably multiple, feed inlets 503A, 503B, 503C, 503D for at least one of monomer, co-monomer, co-catalyst, diluent, polymer modifier, process additive, or mixtures thereof. The polymer modifiers can be used to change the polymer structure and properties. The process additives can be used to improve reactor operating efficiency such as to reduce static effect of running a large loop reactor. As would readily occur to one of ordinary skill in the art having the benefit of the present disclosure, many different co-monomers, co-catalysts, diluents, polymer modifiers, and process additives can be used in this process. For example, in a typical ethylene polymerization, ethylene can be fed through one or more of the feed inlets 503A, 503B, 503C, 503D in order to maintain a relatively constant ethylene concentration along the loop reactor 1. The process preferably also comprises at least one circulator 501A, 501B, 501C, and/or 501D in the loop reactor. More preferably the circulator is a pump and/or comprises a motor (507) driven device to increase the pressure of the circulating slurry in the loop reactor.

In one embodiment in accordance with the present invention, at least one of the catalyst inlets 502A, 502B, 502C, and/or 502D is located at the suction end of a circulator 501A, 501B, 501C, and/or 501D. At least one feed inlet 503A, 503B, 503C, and/or 503D is preferably located at the discharge end of at least one circulator. More preferably, there is at least one catalyst inlet and at least one feed inlet located at the suction end and discharge end, respectively, of the same circulator.

The locations of catalyst inlets, circulators, and feed inlets are strategically placed along the loop reactor to maintain constant reaction kinetics along the loop reactor, generally within 45%, preferably within 25%, more preferably within 10% of points of symmetry, and most preferably placed at their points of symmetry. "Points of symmetry" means points that are equidistant along the entire length of the loop reactor. For example, for a loop reactor that is 1200 feet long, two points of symmetry would be spaced 600 feet apart, three points of symmetry would be spaced 400 feet apart, four points of symmetry would be located 300 feet apart, etc. By way of non-limiting example, three catalyst inlets located at the points of symmetry of the reactor would be located 400 feet apart for a 1200 foot reactor.

This can further be understood by way of non-limiting illustration in Fig. 6. Fig. 6 illustrates a 1200 foot reactor wherein the points of symmetry (A, B, C) are 400 feet apart. The distance between A and A1 is 25% of the 400 feet, i.e. 100 feet. The distance between A and A2 is 10% of the 400 feet, i.e. 40 feet. Three feed inlets located within 25% of their points of symmetry would each be located within 25% of the 400 foot points of symmetry or from 300 (between A1-B) to 500 (between C-A1) feet apart. It is understood that one or more of these elements will not be equidistant from the others. For example, for a 1200 foot loop reactor having three catalyst inlets, it would be within the scope of the present invention for a first and second catalyst inlet to be 400 feet apart, with the third inlet spaced 300 feet from the second catalyst inlet and 500 feet from the first.

The loop reactor length can be at least 750 feet, preferably at least 1,000 feet, and more preferably at least 1,400 feet. Independently, the loop reactor can have at least 6 legs, preferably at least 8 legs, and more preferably at least 12 legs. Also independently, the loop reactor can also be at least 10,000 gallons, preferably at least 20,000 gallons, more preferably at least 35,000 gallons, and most preferably at least 40,000 gallons in volume.

Turning again to Fig. 5, for example, to strategically locate 4 circulators 501A, 501B, 501C, 501D along a 1,000 feet long loop reactor 1, the points of symmetry of the 4 circulators are 250 feet apart. The most preferred location of circulators 501A, 501B, 501C, 501D are at the points of symmetry. The 4

circulators will be about 250 feet apart from each other. The catalyst inlets 502A, 502B, 502C, 502D and feed inlets 503A, 503B, 503C, 503D are also, ideally, spaced evenly at their points of symmetry along the loop reactor and preferably at the suction and discharge ends of the same circulator. While Fig. 5 illustrates an example wherein each of the 4 circulators has a catalyst inlet and a feed inlet at the circulator's suction and discharge ends, respectively, it need not be so in operation. Constant reaction kinetics can be achieved by operating a number of combinations of circulator, catalyst inlet, and feed inlet, arrangements as will readily occur to one of ordinary skill in the art having the benefit of the present disclosure. For example, constant reaction kinetics can be achieved in some applications with two circulators, three catalyst inlets, and four feed inlets.

Although "constant reaction kinetics" is defined as the difference of the reactant monomer concentrations, measured in wt. %, taken at any two points along the loop reactor, to be within 20% of the higher value, it is preferred that the difference of the two reactant monomer concentrations is within 10% of the higher value, more preferably within 5% of the higher value. This can be accomplished by strategically placing the catalyst inlets, feed inlets and circulators as disclosed above and by operating a number of combinations of circulator, catalyst inlet, and feed inlet, arrangements as will readily occur to one of ordinary skill in the art having the benefit of the present disclosure.

Another aspect of the present invention is to produce polymer in a continuous slurry loop reactor which comprises: reacting a monomer in a hydrocarbon diluent to form a polymerization slurry of polymer solids in a liquid medium; discharging a portion of the polymerization slurry as effluent which comprises a slurry of discharged polymer solids in a discharged liquid medium through at least two discharge conduits; combining the effluent from at least two of the discharge conduits; flashing the combined effluent in a first flash to form a first flash vapor and a first flash slurry; and condensing at least a portion of the first flash vapor without compression. A non-limiting schematic illustration of the multiple discharge conduits is shown as 504A and 504B of Fig. 5. Preferably, the discharge of slurry effluent through at least one discharge conduit 504A and 504B is continuous and more preferably the discharge of slurry effluent through at least

two discharge conduits is continuous. With multiple discharge conduits, the production can continue even when one discharge conduit is taken out of service.

Also preferably, the effluent from all discharge conduits is combined into a single transfer conduit 508. It is understood that the aspect of multiple slurry discharge can be considered alone or in combination with all other aspects of the present invention described herein.

The discharge conduits are strategically placed along the loop reactor, generally within 45%, preferably within 25%, more preferably within 10% of points of symmetry, and most preferably placed at their points of symmetry. Fig. 5 illustrates a design where two discharge conduits 504A and 504B are located at or near the bottom run of the loop reactor 1. At least one bottom run of the loop reactor is preferably a 180° bend. While more discharge conduits could be provided on each bend, it is preferable that the at least two discharge conduits are each located within a separate 180° bend bottom run in the reactor, i.e., one discharge conduit per one bottom run. The slurry from both discharge conduits are preferably combined into one transfer conduit 508.

As shown in Fig. 7, the discharge conduit is preferably located within 45° of the center (7C) of the bottom run (between 7A and 7B). Preferably, the location is within 25° of the center of the 180° bend. More preferably, the discharge conduit is within 10° of the center of the 180° bend. Most preferably, the discharge conduit is located at the center of the 180° bend (7C).

As described above, the loop reactor length can be at least 750 feet, preferably at least 1,000 feet, and more preferably at least 1,400 feet. Independently, the loop reactor can have at least 6 legs, preferably at least 8 legs, and more preferably at least 12 legs. Also independently, the loop reactor can also be at least 10,000 gallons, preferably at least 20,000 gallons, more preferably at least 35,000 gallons, and most preferably at least 40,000 gallons in volume. In one embodiment in accordance with the present invention with all the disclosed features, a loop reactor having a length of greater than 1,350, preferably greater than 1,400, more preferably greater than 1,450 feet, can be effectively operated. In another preferred embodiment, a loop reactor having greater than 8 legs,

preferably greater than 10 legs, more preferably greater than 12 legs, can be effectively operated.

A further understanding of some other aspects of the present invention will be provided by referring to Fig. 1 which illustrates a system comprising an embodiment of the invention.

In the embodiment illustrated in Fig. 1, the polymerization is carried out in a loop reactor 1. It will be understood that while the loop reactor 1 is illustrated with four vertical legs, the loop reactor 1 may be equipped with more legs, desirably eight or more legs, desirable between 8 and 20, more desirable between 8 and 16, most desirable with 12 legs. The polymerization slurry is directionally circulated throughout the loop reactor 1 as illustrated by arrows A-D by one or more pumps, such as axial flow pumps, 2A and 2B. Desirably, the loop reactor 1 is equipped with multiple pumps wherein each pump is dedicated to an even number of legs, such as for example, four legs, six legs, eight legs, etc. Diluent comonomer and monomer are introduced into the loop reactor 1 from the diluent storage vessel 40, the comonomer storage vessel 41, and the monomer source 42 through their respective treater beds 37, 38, and 39 through conduits 5, 4 and 3, respectively, connected to conduit 6. Catalyst is added to the loop reactor 1 through one or more catalyst feed systems 7A and 7B.. Normally, catalyst is introduced in a hydrocarbon diluent.

Polymerization slurry may be removed from the loop reactor by continuous discharge through a discharge conduit 8A. It will be understood that the loop reactor 1 may be equipped with one or more discharge conduits 8A. It will be also understood that the discharge conduit(s) 8A may be operated in a continuous or discontinuous mode, but desirably a continuous mode. The discharge conduit 8A extends for a distance through a portion of the wall of the loop reactor 1 and into the circulating polymerization slurry. By extending for a distance into the polymerization slurry, the discharge conduit 8A may remove polymerization effluent from the circulating polymerization slurry over an area defined from near or adjacent the inside wall of the loop reactor 1 to a distance extending into the circulating polymerization slurry. In this way, a higher weight percentage of polymer solids may be formed within the conduit 8A and ultimately

removed from the loop reactor 1 than the weight percentage of polymer solids within the otherwise circulating polymerization slurry. A pressure control system (not shown in Fig. 1) operates in concert with the discharge conduit 8A. The discharge conduit 8A and the pressure control system 410 are more clearly
5 illustrated in Figs 3 and 4 and will be discussed in greater detail below.

The polymerization effluent passes from the discharge conduit 8A to the discharge valve 8B to a conduit 9 which is provided with a line heater 10 and into the first flash tank 11 which separates vaporized liquid medium from polymer slurry/solids. Conduit 9 has an indirect heat exchange means such as a flash line
10 heater 10.

Vaporized liquid medium comprising diluent and unreacted monomers exit the first flash tank 11 via transfer conduit 12 through which it is passed into a separator, such as a cyclone, illustrated by reference number 13 which separates entrained polymer solids from the vapor. Polymer solids separated by the cyclone
15 13 are passed via conduit 14 through a dual valving assembly 14A designed to maintain a pressure seal below cyclone 13 to a lower pressure second flash tank 15.

The dual valving assemble 14A includes valves 14B and 14C. The valving assemble 14A in conjunction with conduit 14 operate to periodically discharge
20 polymer solids which have collected in the conduit 14 from the cyclone 13. The valving assembly 14A also maintains the pressure differential between the higher pressure environment in the cyclone 13 and the lower pressure environment in the second flash tank 15. In the operation of the valving assembly 14A, valves 14B and 14C are sequentially opened and closed. At the beginning of this sequence,
25 the valve 14B is open and the valve 14C is closed allowing the polymer solids from the cyclone 13 to collect in the conduit 14. Upon the passage of time and/or the collection of sufficient polymer solids in the conduit 14, the valve 14B closes capturing a portion of the high pressure environment from the cyclone 13 in the conduit 14. After the valve 14B closes, the valve 14C opens and the polymer
30 solids collected in the conduit 14 are forcibly discharged into the flash tank 15 by the differential pressure between the higher pressure environment in conduit 14 and the lower pressure environment in the flash tank 15. After discharging the

-23-

polymer solids from conduit 14 into the flash tank 15, the valve 14C closes. Once the valve 14C closes, the valve 14B is opened at which time polymer solids will again collect in conduit 14 from the cyclone 13. The above sequence is then repeated.

5 Referring back to the first flash tank 11, the concentrated polymer solids/slurry in the bottom of the first flash tank 11 continuously settles by sliding along the straight line bottom surface 16 thereof into the seal chamber 17 which is illustrated in enlargement Figure 2. A polymer solids/slurry level 43 is maintained in the seal chamber 17 to eliminate plugging tendencies in first flash
10 tank 11 and to form a pressure seal so that the first flash tank 11 can operate at a substantially higher pressure than the second flash tank 15. Polymer slurry/solids are continuously discharged from the seal chamber 17 into the lower pressure second flash tank 15. The length (l), diameter (d), and volume of the seal
15 chamber 17 and the geometry of the seal chamber exit reducer 18 are chosen so as to provide a variable residence time and provide a continuous plug flow of concentrated polymer solids/slurry to minimize "dead" space and reduce plugging tendencies. The seal chamber 17 length must be sufficient to allow particle (polymer solids) level measurement and control.

Particle level measurement and control may be accomplished by a nuclear
20 level indicating system 18D. The nuclear level indicating system 18D includes a nuclear radiating source (not shown) and receiver or level element 18A in signal communication with a level indicating controller 18B. In operation, the level element 18A generates a signal proportional to the particulate level in the seal chamber 17. This signal is conveyed to the level indicating controller 18B. In
25 response to this signal and a preset value, the level indicating controller 18B sends a signal through a conduit (illustrated by broken line 18C) to a control valve 18 E which selectively controls the discharge of polymer solids into a conduit 19.

Typical residence times of the concentrated polymer solid/slurry in the seal
30 chamber 17 are from 5 seconds to 10 minutes, preferable residence times are from 10 seconds to 2 minutes and most preferable residence times from 15 - 45 seconds. The continuous plug flow of concentrated polymer solids/slurry forms a pressure seal wherein the concentrated polymer solids/slurry have an l/d ratio

-24-

inside the seal chamber 17 which is typically 1.5 to 8, preferable l/d is 2 to 6 and most preferable is 2.2 to 3. Typically the seal chamber exit reducer 18 sides are inclined, relative to the horizontal, 60 - 85 degrees, preferable 65 - 80 degrees and most preferable 68 - 75 degrees. The seal chamber exit reducer 18 geometry is defined by substantially straight sides inclined at an angle to that of horizontal equal to or greater than the angle of slide of the concentrated polymer slurry/solids and communicates the concentrated polymer solid/slurry to a second transfer conduit 19 which communicates with a feed inlet of flash tank 15. In flash tank 15 substantially all of any remaining inert diluent and unreacted monomer in the concentrated polymerization effluent is vaporized and taken overhead via conduit 20 to a second cyclone 21.

Referring now to the cyclone 13, the major portion of the liquid medium in the polymerization effluent may be taken to cyclone 13 as vapor. The vapor after having a portion of the entrained catalyst and polymer solids removed is passed via conduit 22 through a heat exchanger system 23A wherein the vapor at a pressure from about 140 psia to about 315 psia is condensed by indirect heat exchange with a heat exchange fluid such as to eliminate the need for compression. The portion of the entrained catalyst and polymer solids not removed by the cyclone 13 are generally smaller in size and may be referred to as "fines", "polymer fines" and/or "catalyst fines". These fines generally include unreacted and/or under-reacted catalyst.

The heat exchanger system 23A includes a heat exchanger 23E and a tempered water circulating pump 23B connected to the heat exchanger 23E by conduit 23C. A tempered water temperature control valve 23D is connected to the heat exchanger 23E and water circulating pump 23B by conduits 23F and 23G, respectively. Cooling water from a cooling water source (not shown) is conveyed via a cooling water conduit 23H into the conduit 23G between the control valve 23D and the circulating pump 23B. A temperature indicating controller (TIC) 23J is connected between the control valve 23D and the conduit 23C. Between the controller 23J and the conduit 23C resides a temperature element 23K.

The heat exchanger system 23A operates to control the amount of vapor condensed in the heat exchanger 23E. This is accomplished by controlling the

-25-

flow of cooling water introduced into the conduit 23G from the conduit 23H by exhausting heated water formed in the heat exchanger 23E. The heated water from the heat exchanger 23E is conveyed to the control valve 23D via the conduit 23F. The heated water exits the control valve 23D via the conduit 23I.

5 More specifically, cooling water from the conduit 23H entering the conduit 23G mixes with circulating tempered water in the conduit 23G, the mixture thereof enters the pump 23B. The water exiting the pump 23B enters the conduit 23C, a portion of which contacts the temperature element 23K, in route to the heat exchanger 23E. The temperature element 23K generates an signal
10 proportional to the temperature in conduit 23C. The signal is conveyed to the temperature indicating controller 23J. In response to this signal and a preset temperature value, the temperature indicating controller 23J sends a signal through a signal conduit (illustrated by the broken line 23L) to the control valve 23D which selectively controls the volume of heated water exiting the heat
15 exchanger system 24A through the conduit 23I.

 The condensed liquid medium formed at the heat exchanger 23E includes diluent, unreacted/under-reacted catalyst, polymer solids and unreacted monomers. This condensed liquid medium is then passed to an accumulator 24B via a conduit 22A.

20 It is desirable to control the amount of vapor condensed in the heat exchanger 23E and to maintain sufficient vapor pressure in the accumulator 24B. In this way, a pressure control valve 24A can maintain sufficient back pressure on the accumulator 24B. By maintaining a sufficient back pressure on the accumulator 24B, a proper operating pressure is maintained in the first flash tank
25 11. The pressure control valve 24A is actuated by a pressure indicating controller 24C in concert with a pressure element 24D. The pressure element 24D is in sensing communication with the accumulator 24B. The pressure element 24D generates an signal proportional to the pressure in the accumulator 24B. In response to this signal and a preset pressure value, the pressure indicating
30 controller 24C sends a signal through a signal conduit (illustrated by the broken line 24E) to the control valve 24A which selectively controls the back pressure on the accumulator 24B.

A pump 25 is provided for conveying the condensed liquid medium from the accumulator 24B back to the polymerization zone by a conduit 26. In this way, the unreacted/under-reacted catalyst and polymer solids not removed by the cyclone 13 are returned for further polymerization to the loop reactor 1.

5 The polymer solids in the lower pressure second flash tank 15 are passed via a conduit 27 to a conventional dryer 28. The vapor exiting the secondary cyclone 21, after filtration in a filter unit 29, is passed by a conduit 30 to a compressor 31 and the compressed vapors are passed through a conduit 32 to a condenser 33 where vapor is condensed and the condensate is passed through
10 conduit 34 to storage vessel 35. The condensed liquid medium in the storage vessel 35 is typically vented overhead for removal of light-end contaminants. The inert diluent can be returned to the process through a treater bed 37 to remove catalyst poisons or distilled in unit 36 for more complete removal of light-ends and then returned to the process through a treater bed.

15 Turning now to Fig. 3, a portion of a wall 310 of the loop reactor 1 through which the discharge conduit 8A extends is illustrated. The discharge conduit 8A may extend into the reactor at various angles. Desirably, the discharge conduit 8A extends into the loop reactor at substantially a right angle relative to the wall 310.

 The wall 310 includes an inside surface 312 and an outside surface 314.
20 The inside surface 312 supports the circulating polymerization slurry illustrated by directional arrows 318. The discharge conduit 8A has a top 316A, and a continuous side 316B. Portions of the side 316B define an opening 320. The opening 320 has a vertical opening dimensions v1 and v2 defined by walls 320A and 320B of the side 316B. Desirably, the v1 dimension is greater than the v2
25 dimension. The opening 320 has horizontal opening dimensions h1 and h2 (not shown). The opening 320 may be formed in any suitable shape, such as rectangular, oval, or a combination thereof. In one embodiment, the opening 320 may be conical-shaped or scooped shaped.

 The opening 320 communicates with a channel 322 defined by the inside
30 surfaces of the top 316A and the side 316B. The channel 322 conveys captured polymerization slurry, illustrated by directional arrow 324 to the discharge valve 8B (not shown).

The opening 320 is sized and positioned relative to the direction of movement of the circulating polymerization slurry 318. Desirably, the opening 320 is in a substantially facing position to the direction of the circulating polymerization slurry 318. More desirably, the opening 320 faces the direction of the circulating slurry 318. In this way, a portion of the polymerization slurry 324 containing polymer solids is removed from the circulating polymerization slurry 318 over an area from near or adjacent the inside wall 312 of the loop reactor 1 to a distance extending into the circulating polymerization slurry 318. In this way, a higher weight percentage of polymer solids may be formed within the conduit 8A than the weight percentage of polymer solids within the otherwise circulating polymerization slurry.

This weight percentage increase of polymer solids may depend upon the location of the discharge conduit 8A along the loop reactor 1, the insertion depth of the discharge conduit 8A within the loop reactor, the size and configuration of the opening 320, the orientation of the opening 320 relative to the direction of the circulating polymerization slurry, and the weight percentage of polymer solids in the circulating polymerization slurry 318. For example, between 1 to 5 weight percentage calculated increase is observed with a discharge conduit 8A having an v1 dimension of approximately 5 inches and a h1 dimension of approximately 1 inch. The discharge conduit 8A was positioned 10 ft downstream of a 90 degree bend in the loop reactor 1 in a portion of the loop reactor wall 314 adjacent the ground. The discharge conduit 8A extended approximately 5.5 inches into the circulating polymerization slurry stream. The velocity of the circulating polymerization slurry was in the range of 28 to 34 ft/sec with weight percent of polymer solids in the range of 48 to 53.

Turning now to Fig. 4, the pressure control system 410 is illustrated. The pressure control system 410 operates to maintain substantially uniform pressure within the loop reactor 1 by controlling the discharge of polymerization effluent from the loop reactor 1 via the discharge conduit 8A. The control system 410 also operates to prevent plugging of the discharge conduit 8A by polymer solids during pressure fluctuations within the loop reactor 1 and/or when the flow of

polymerization effluent from the discharge conduit 8A to conduit 9 is interrupted and/or stopped.

The pressure control system 410 includes a first inert diluent source 412, such as isobutane, and an inert diluent conduit 414 in communication with a loop reactor conduit 416. The flow of inert diluent through the inert diluent conduit 414 to the loop reactor conduit 416 is controlled by the control valve 418 in concert with a flow element 420 and a flow indicator controller 422. The purpose of metering the flow of inert diluent from the first inert diluent source 412 to the loop reactor 1 is to prevent plugging of the conduit 416 by polymer solids. In this way, a loop reactor pressure element 441 (discussed below), in communication with the loop reactor conduit 416, may more accurately monitor the pressure in the loop reactor 1.

The pressure control system 410 further includes a second inert diluent source 424 and a third inert diluent source 426. Inert diluent, such as isobutane, from the second inert diluent source 424 flows into a conduit 428 towards a control valve 430 which is in fluid communication with a conduit 432. The control valve 430, in concert with a flow element 431 and a flow indicator controller 433, meters the flow of inert diluent from the second inert diluent source 424 into conduit 432. The conduit 432 is in fluid communication with a conduit 434 and the discharge conduit 8A, terminating in the discharge conduit 8A at a point between the loop reactor 1 and the discharge valve 8B. The purpose of metering the flow of inert diluent from the second inert diluent source 422 into the conduit 432 is to prevent plugging of the conduit 432 by polymer solids which might otherwise back flow into the conduit 432 from the discharge conduit 8A. Additionally, the flow of inert diluent from the second inert diluent source 422 also prevents plugging of the conduit 434 and the control valve 440 by polymer solids which might back flow into conduit 432 from the discharge conduit 8A.

Inert diluent from the third inert diluent source 426 flows into a conduit 438 towards a control valve 440 which is in fluid communication with conduit 434. As will be explained in greater detail below, in the event of a sufficient pressure fluctuation within the loop reactor 1, the control valve 440 operates to

initiate a sufficient flow under sufficient pressure of inert diluent from the third inert diluent source 426 to purge and/or discharge polymer solids from the discharge conduit 8A into the loop reactor 1. In this instance, generally the flow of inert diluent from the third inert diluent source 426 into the conduit 432 will be greater than the flow of inert diluent from the second inert diluent source 424 into the conduit 432. For example, the flow of inert diluent from the second inert diluent source 424 to the discharge conduit 8A may be in a range of 0.5 to less than 2.0 gallons/min. The flow of inert diluent from the third inert diluent source 426 to the discharge conduit 8A may be in a range of 2.0 to 20 gallons/min.

The loop reactor pressure element 441 and a pressure indicating controller 442 perform several functions. As previously mentioned, the pressure element 441 monitors the loop reactor 1 pressure via the conduit 416. In response to this pressure, the loop reactor pressure element 441 generates an signal proportional to the pressure in conduit 416. This signal is conveyed to the pressure indicating controller 442. In response to this signal and a preset pressure value, the pressure indicating controller 442 sends a signal through a signal conduit (illustrated by the broken line 444) to the discharge valve 8B and the control valve 440.

During normal loop reactor operations, the discharge valve 8B is positioned to permit the flow of polymerization effluent from the discharge conduit 8A to conduit 9. At the same time, the control valve 440 is closed preventing the flow of inert diluent from the third inert diluent source 426 to the discharge conduit. When sufficient pressure fluctuations occur and/or when partial depressurization in the loop reactor 1 are detected by the loop reactor pressure element 441, the signal generated by the pressure indicating controller 442 causes the discharge valve 8B to close and the control valve 440 to open. By closing discharge valve 8B, thus interrupting the discharge from the loop reactor 1, pressure within the loop reactor 1 may be restored. By opening the control valve 440 and flowing sufficient volumes of inert diluent from the third inert diluent source 426 into the discharge conduit 8A under sufficient pressure, polymer solids remaining in the discharge conduit 8A between the discharge valve 8B and the loop reactor 1 may be flushed out of and/or purged from the discharge conduit 8A and into the loop reactor 1. Additionally, by maintaining a sufficient

flow of inert diluent, continuous or otherwise, into and/or through the discharge conduit 8A while the discharge valve 8B is closed, the polymer solids within the loop reactor 1 are prevented from entering and/or substantially collecting in the discharge conduit 8A and/or plugging the discharge conduit 8A. Upon return of
5 normal operations, the control valve 440 closes terminating the flow of inert diluent from the third inert diluent source 426 and the discharge valve 8B opens to resume the flow of polymerization effluent through the discharge conduit 8A into the conduit 9.

Having broadly described the present invention it is believed that the same
10 will become even more apparent by reference to the following examples. It will be appreciated that the examples are presented solely for the purpose of illustration and should not be construed as limiting the invention.

EXAMPLES

15 Example 1

A typical ethylene polymerization process can be conducted at a temperature of about 215° F and a pressure of 565 psia. An example of such a process would result in a polymerization effluent of about 83,000 pounds per hour comprising about 45,000 pounds per hour of polyethylene polymer solids and
20 about 38,000 pounds per hour of isobutane and unreacted monomers. The continuously discharged polymerization effluent is flashed in the first flash tank at a pressure of about 240 psia and a temperature of about 180° F to remove overhead about 35,000 pounds per hour of diluent and unreacted monomer vapors and entrained particulates. Auxiliary heat to impart an additional quantity of heat
25 to the polymerization effluent is supplied by appropriate heating means during the transit between the discharge valve and the first flash tank. After removal of the fines, the isobutane vapor is condensed, without compression, by heat exchange at a pressure of about 240 psia and a temperature of about 135° F. The polymer slurry/solids discharging from the bottom of the first flash tank into the seal
30 chamber form a continuous plug flow of concentrated polymer slurry/solids, which provides a pressure seal, with an l/d ratio of the plug of polymer slurry/solids of 2.5 in an 8'4" long seal chamber having an l/d ratio of 5.5 and

with a cone angle of about 68° on the seal chamber exit reducer. The residence time of the continuous plug flow of concentrated polymer slurry/solids is about 16 seconds. The concentrated polymer slurry/solids are continuously discharged from the bottom of the first flash tank at a temperature of about 180° F and a pressure of about 240 psia through a seal chamber, seal chamber exit reducer, and a second transfer conduit into a feed inlet on a second flash tank. The remaining liquid medium in the concentrated polymer slurry/solids communicated to the second flash tank is flashed at a temperature of about 175° F and at a pressure of about 25 psia to remove about 4,300 pounds per hour of isobutane and unreacted monomers which are condensed by compression and heat exchange.

Example 2

A typical ethylene polymerization process can additionally be conducted at a temperature of about 215° F and a pressure of 565 psia. An example of such a process would result in a polymerization effluent of about 83,000 pounds per hour comprising about 45,000 pounds per hour of polyethylene polymer solids and about 38,000 pounds per hour of isobutane and unreacted monomers. The continuously discharged polymerization effluent is flashed in the first flash tank at a pressure of about 240 psia and a temperature of about 175° F to remove overhead about 23,000 pounds per hour of diluent and unreacted monomer vapors and entrained particulates. After removal of the fines, the isobutane vapor is condensed, without compression, by heat exchange at a pressure of about 240 psia and a temperature of about 112° F. The polymer slurry/solids discharging from the bottom of the first flash tank into the seal chamber form a continuous plug flow of concentrated polymer slurry/solids, which provides a pressure seal, with an l/d ratio of the plug of polymer slurry/solids of 2.5 in an 8'4" long seal chamber with an l/d ratio of 5.5 and with a cone angle of about 68° on the seal chamber exit reducer. The residence time of the continuous plug flow of concentrated polymer slurry/solids in the seal chamber is about 16 seconds. About 60,000 pounds per hour of concentrated polymer slurry/solids are continuously discharged from the bottom of the first flash tank at a temperature of about 175° F and a pressure of about 240 psia through a seal chamber, seal chamber exit reducer and a second transfer conduit into a feed inlet on a second

flash tank. The remaining liquid medium in the concentrated polymer slurry/solids communicated to the second flash tank is flashed at a temperature of about 125° F and at a pressure of about 25 psia to remove about 16,000 pounds per hour of isobutane and unreacted monomer which are condensed by compression and heat exchange.

Example 3

An example of a typical ethylene polymerization process was carried out in an eight leg, 20 inch reactor with settling legs having an overall length of 833 ft and a volume of 11,500 gallons. The reactor was equipped with a single flash tank (requiring 100% compression of all diluent discharged from the reactor), a single 460-480 kilowatt circulating pump having a pump head in the range from 85 ft to 110 ft, producing a circulation rate in the range from 21,000 to 28,000 gallons per minute (gpm) and operated in a discontinuous discharge mode. The polymerization temperature and pressure in the reactor would be between about 215° F to 218° F and a pressure of 565 psia.

In the process of example 3, the reactor slurry density is in the range from 0.555 gm/cc to 0.565 gm/cc, a polymer production rate range from 28,000 pounds to 31,000 pounds per hour while maintaining a reactor solids concentration weight percentage in the range from 46 to 48 with a polymer residence time in the range from 0.83 to 0.92 hours. Space time yield (STY) was in the range from 2.4 to 2.7. Example 3 data and results are further illustrated in Table 1.

Example 4

Another example of a typical ethylene polymerization process illustrating high polymer solids loading was carried out in an eight leg, 20 inch reactor having an overall length of 833 ft and a volume of 11,500 gallons. The reactor in example 4 was equipped dual flash tanks, single discharge conduit, two circulating pumps in series consuming a total of between 890 and 920 kilowatts producing a total pumping head in the range from 190 ft to 240 ft, producing a circulation rate in the range from 23,000 to 30,000 gpm and operated in a continuous discharge mode. The polymerization temperature and pressure in the reactor would be between about 217° F to 218° F and a pressure of 565 psia.

In the process of example 4 a polymerization effluent was produced having a reactor slurry density in the range from 0.588 to 0.592 gm/cc, a polymer production rate in the range from 38,000 to 42,000 pounds per hour while maintaining a reactor solids concentration weight percentage in the range of 54 to 57 with a polymer residence time in the range of 0.68 to 0.79 hours. Space time yield (STY) was in the range of 3.3 to 3.7. Example 4 data and results are further illustrated in Table 1.

The continuously discharged polymerization effluent is flashed in the first flash tank at a pressure of about 240 psia and a temperature of about 175° F to remove overhead about 16,000 pounds per hour of diluent and unreacted monomer vapors and entrained particulates. After removal of the fines, the isobutane vapor is condensed, without compression, by heat exchange at a pressure of about 240 psia and a temperature of about 112° F. The polymer slurry/solids discharging from the bottom of the first flash tank into the seal chamber form a continuous plug flow of concentrated polymer slurry/solids, which provides a pressure seal, with an l/d ratio of the plug of polymer slurry/solids of 2.5 in an 8'4" long seal chamber with an l/d ratio of 5.5 and with a cone angle of about 68° on the seal chamber exit reducer. The residence time of the continuous plug flow of concentrated polymer slurry/solids in the seal chamber is about 16 seconds. Concentrated polymer slurry/solids are continuously discharged from the bottom of the first flash tank at a temperature of about 175° F and a pressure of about 240 psia through a seal chamber, seal chamber exit reducer and a second transfer conduit into a feed inlet on a second flash tank. The remaining liquid medium in the concentrated polymer slurry/solids communicated to the second flash tank is flashed at a temperature of about 125° F and at a pressure of about 25 psia to remove about 16,000 pounds per hour of isobutane and unreacted monomer which are condensed by compression and heat exchange.

TABLE 1
ETHYLENE POLYMERIZATION DATA

	<u>EXAMPLE 3</u>	<u>EXAMPLE 4</u>
Nominal pump(s) size, inches	20	20
5 Reactor solids concentration, wt. %	46 - 48	54 - 57
Polymer production rate, K lbs./hr.	28 - 31	38 - 42
Reactor circulation pump power, KW	460 - 480	890 - 920
Circulation pump head, ft.	85 - 110	190 - 240
Circulation rate, GPM	21,000 - 28,000	23,000 - 30,000
10 Reactor slurry density, gm/cc	0.555 - 0.565	0.588 - 0.592
Reactor temperature, degrees F	215 - 218	217 - 218
Ethylene concentration, wt. %	4.0 - 4.4	5.0 - 6.0
Hexene concentration, wt. %	0.13 - 0.19	0.13 - 0.19
Heat transfer coefficient, btu/hr-f-ft	215 - 225	230 - 245
15 Reactor volume, gallons	11,500	11,500
Reactor length, ft.	833	833
Circulating pump head per reactor length, ft/ft	0.100 - 0.132	0.228 - 0.288
Catalyst productivity, lb/lb	2,700 - 3,000	2,700 - 3,000
20 Polymer residence time, hrs.	0.83 - 0.92	0.68 - 0.79
Space time yield, lbs/hr - gal	2.4 - 2.7	3.3 - 3.7
Isobutane compressed and recycled, %	100	45 - 60

Discussion

25 In view of the above description and examples, several observations relative to the apparatus and process can be made.

It has been observed that by increasing the head and flow capability of the loop reactor circulating pump(s), higher weight percent solids can be circulated in the reactor. It has also been observed that attaining the necessary head and flow
30 from one pump is increasingly difficult as percent solids are increased above 45 weight percent and/or reactor length is increased. Therefore, the use of two pumps in series allows a doubling of pumping head capability and a resulting

percent solids increase. Increased weight percent solids in the loop reactor increases catalyst residence time, which for chrome oxide and Ziegler-Natta catalysts, increases catalyst productivity. One can choose to take advantage of higher percent solids and longer residence time by keeping production rate
5 constant at reduced catalyst feed rate and improve the catalyst yield. Another alternative is to maintain catalyst feed rate constant and increase the reactor throughput and therefor increase STY at nearly constant catalyst productivity. Higher solids also increases the weight percent solids removed from the reactor which reduces isobutane processing cost in recycle equipment. Desirably, the
10 higher solids are removed continuously. Continuous discharge may occur through a single point discharge line.

In a loop reactor, it is not always possible to locate the continuous discharge line in an optimal location to take advantage of centrifugal force to increase the weight percent solids and therefore reduce the amount of isobutane entrained with the polymer solids. It has been observed that a specifically
15 designed pipe as illustrated in Figure 3 inserted into the loop reactor can increase weight percent solids removed from the reactor. This pipe insert will function in any section of the loop reactor and in a straight section will increase the weight percent solids to that equal to that in a location which takes advantage of
20 centrifugal force to concentrate solids.

With the development of high weight percent solids circulation capability in the loop reactor and two-stage flash, the need to concentrate solids in the reactor discharge is reduced compared to the conventional loop reactor operations having low solids circulation, single-stage flash, continuous discharge line, and
25 continuous discharge or otherwise. Therefore, the conventional loop reactor settling legs, which are designed to maximize polymer solids concentration prior to discharge, can be replaced with a continuous discharge line, which simplifies the system mechanically, reduces capital cost, improves safety, reduces maintenance and improves reactor control. Settling legs require routine
30 maintenance due to their plugging tendency and can form material which plugs downstream polymer handling equipment. Maximum loop reactor ethylene concentration is limited by settling legs due to the tendency for polymer to grow

in the legs at elevated ethylene concentrations between discharges and therefore plug the leg. Continuous discharge eliminates this tendency. Another advantage of continuous discharge is better response to a sudden drop in reactor pressure, which can happen if ethylene flow is quickly reduced. Under this condition, settling legs will stop discharging and can plug with polymer within minutes

A development which would increase efficiency of the two-stage flash system is the continuous flash line heater. The heater would vaporize up to 100% of the diluent discharged from the reactor with the polymer which would allow greater recovery of the diluent by the intermediate pressure condenser. Diluent recovery through the first flash tank would reduce utility and capital cost. Conventional low pressure single-stage diluent recovery systems include compression, distillation and treatment which have high capital and operating cost. The flash line heater would increase the temperature of the polymer in the downstream dryer system and would create the potential for lower volatile levels in the final product, which would lower variable cost, improve safety and aid attainment of environmental standards.

The first flash tank provides an intermediate pressure flash step which allows for simple condensation of diluent and return to the reactor. The flash line heater would be capable of supplying sufficient heat to vaporize up to 100% of the diluent in the first flash tank.

Diluent vapor and unreacted/under reacted catalyst/polymer fines go overhead from the flash tank to the cyclone. The bulk of the polymer goes out the bottom of the first flash tank through the seal chamber to the second flash tank.

Connected to the bottom of the first flash tank is the seal chamber which provides for a low residence time plug flow area to control polymer level and maintain pressure in the first flash tank. The seal chamber is designed to accommodate a range of polymer forms from concentrated slurry to dry polymer.

The overhead stream from the first flash tank is received by the cyclone, which removes most of the polymer fines and returns them to the bulk of the polymer flow in the second flash tank through a two valve system which allows the fines to accumulate between the valves, then discharge through the bottom valve while maintaining pressure in the first flash system. The overhead stream

from the cyclone contains some unreacted/under reacted catalyst and polymer fines. These particles are carried with the diluent vapor to the condenser, entrained with the liquid diluent after condensation, collected in the accumulator and returned to the reactor in the diluent. The condensation and accumulator
5 systems are designed and operated to accommodate fines.

The condenser provides for low variable and capital cost liquefaction of the diluent removed from the reactor with the polymer via the first flash tank. Conventional single flash tank systems flash the polymerization effluent to the just above ambient pressure, which requires compression to liquefy the diluent
10 prior to recycle to the loop reactor. An intermediate pressure flash provides for condensation with a commonly available cooling medium, such as Plant cooling water. The condenser system is flushed with diluent and designed to accommodate a level of fines without accumulation or plugging. The condenser is cooled by a tempered water system which controls the condensation temperature
15 to achieve the proper vapor pressure in the accumulator to allow efficient pressure control by the pressure control valve on the accumulator vent. The condenser tempered water system is a pump-around loop of cooling water, the temperature of which is controlled by metering in fresh cooling water as needed.

The accumulator receives the condensed diluent and catalyst/polymer fines
20 and pumps the mixture back to the loop reactor based on level control in the accumulator. The accumulator has a bottom shape designed to accommodate fines. A vent on the accumulator purges the accumulated diluent of light-ends/non-condensables and controls pressure on the first flash system.

The second flash tank, operating just above ambient pressure, receives
25 polymer from the first flash tank seal chamber. Complete vaporization, if not already accomplished in the first flash tank, will occur in the second flash tank. Polymer leaves the bottom of the second flash tank to the dryer system. The flash-line heater would increase the temperature of the polymer which allows the dryer system to remove residual volatiles more efficiently and effectively. The
30 overhead of the second flash tank will be diluent vapor not recovered in the first flash system and will be filtered and compressed for return to the loop reactor.

-38-

While the present invention has been described and illustrated by reference to particular embodiments, it will be appreciated by those of ordinary skill in the art that the invention lends itself to many different variations not illustrated herein. For these reasons, then, reference should be made solely to the
5 appended claims for purposes of determining the true scope of the present invention.

Although the appendant claims have single dependencies in accordance with U.S. patent practice, each of the features in any of the appendant claims can be combined with each of the features of other appendant claims or the main
10 claim.

CLAIMS

What is claimed is:

1. A process for producing polymer in a continuous slurry loop reactor
5 comprising:
feeding catalyst, monomer, and, optionally, at least one of co-monomer,
co-catalyst, diluent, polymer modifier, or mixtures thereof into the reactor;
wherein catalyst is fed into the reactor from multiple catalyst inlets; and
recovering polymer from the reactor.
- 10 2. The process of claim 1, further comprising at least one feed inlet for at
least one of monomer, co-monomer, co-catalyst, diluent, polymer
modifier, process additive, or mixtures thereof.
3. The process of claim 1, comprising multiple feed inlets.
4. The process of claim 2, comprising multiple feed inlets.
- 15 5. The process of claim 1, further comprising at least one circulator in the
reactor.
6. The process of claim 2, further comprising at least one circulator in the
reactor.
7. The process of claim 4, further comprising at least one circulator in the
20 reactor.
8. The process of claim 5, wherein the at least one circulator comprises a
pump.
9. The process of claim 6, wherein the at least one circulator comprises a
pump.
- 25 10. The process of claim 5, wherein the at least one circulator comprises a
motor driven device to increase the pressure of the circulating slurry in the
loop reactor.
11. The process of claim 6, wherein the at least one circulator comprises a
motor driven device to increase the pressure of the circulating slurry in the
30 loop reactor.
12. The process of claim 5, wherein at least one of the catalyst inlets is located
at the suction end of at least one circulator.

13. The process of claim 6, wherein at least one of the catalyst inlets is located at the suction end of at least one circulator.
14. The process of claim 5, wherein at least one feed inlet is located at the discharge end of at least one circulator.
- 5 15. The process of claim 6, wherein at least one feed inlet is located at the discharge end of at least one circulator.
16. The process of claim 5, wherein at least one catalyst inlet and the at least one feed inlet are located at the suction end and discharge end, respectively, of a circulator.
- 10 17. The process of claim 6, wherein at least one catalyst inlet and the at least one feed inlet are located at the suction end and discharge end, respectively, of a circulator.
18. The process of claim 7, wherein at least one catalyst inlet and the at least one feed inlet are located at the suction end and discharge end, respectively, of a circulator.
- 15 19. The process of claim 1, wherein the catalyst inlets are located within 45% of the points of symmetry of the loop reactor.
20. The process of claim 2, wherein the catalyst inlets are located within 45% of the points of symmetry of the loop reactor.
- 20 21. The process of claim 3, wherein the catalyst inlets are located within 45% of the points of symmetry of the loop reactor.
22. The process of claim 19, wherein the catalyst inlets are located within 25% of the points of symmetry of the loop reactor.
23. The process of claim 20, wherein the catalyst inlets are located within 25% of the points of symmetry of the loop reactor.
- 25 24. The process of claim 21, wherein the catalyst inlets are located within 25% of the points of symmetry of the loop reactor.
25. The process of claim 22, wherein the catalyst inlets are located within 10% of the points of symmetry of the loop reactor.
- 30 26. The process of claim 23, wherein the catalyst inlets are located within 10% of the points of symmetry of the loop reactor.

27. The process of claim 24, wherein the catalyst inlets are located within 10% of the points of symmetry of the loop reactor.
28. The process of claim 25, wherein the catalyst inlets are located at the points of symmetry of the loop reactor.
- 5 29. The process of claim 26, wherein the catalyst inlets are located at the points of symmetry of the loop reactor.
30. The process of claim 27, wherein the catalyst inlets are located at the points of symmetry of the loop reactor.
31. The process of claim 5, wherein the circulators are located within 45% of the points of symmetry of the loop reactor.
- 10 32. The process of claim 6, wherein the circulators are located within 45% of the points of symmetry of the loop reactor.
33. The process of claim 7, wherein the circulators are located within 45% of the points of symmetry of the loop reactor.
- 15 34. The process of claim 31, wherein the circulators are located within 25% of the points of symmetry of the loop reactor.
35. The process of claim 32, wherein the circulators are located within 25% of the points of symmetry of the loop reactor.
36. The process of claim 33, wherein the circulators are located within 25% of the points of symmetry of the loop reactor.
- 20 37. The process of claim 34, wherein the circulators are located within 10% of the points of symmetry of the loop reactor.
38. The process of claim 35, wherein the circulators are located within 10% of the points of symmetry of the loop reactor.
- 25 39. The process of claim 36, wherein the circulators are located within 10% of the points of symmetry of the loop reactor.
40. The process of claim 37, wherein the circulators are located at the points of symmetry of the loop reactor.
41. The process of claim 38, wherein the circulators are located at the points of symmetry of the loop reactor.
- 30 42. The process of claim 39, wherein the circulators are located at the points of symmetry of the loop reactor.

43. The process of claim 2, wherein the feed inlets are located within 45% of the points of symmetry of the loop reactor.
44. The process of claim 3, wherein the feed inlets are located within 45% of the points of symmetry of the loop reactor.
- 5 45. The process of claim 4, wherein the feed inlets are located within 45% of the points of symmetry of the loop reactor.
46. The process of claim 43, wherein the feed inlets are located within 25% of the points of symmetry of the loop reactor.
47. The process of claim 44, wherein the feed inlets are located within 25% of the points of symmetry of the loop reactor.
- 10 48. The process of claim 45, wherein the feed inlets are located within 25% of the points of symmetry of the loop reactor.
49. The process of claim 46, wherein the feed inlets are located within 10% of the points of symmetry of the loop reactor.
- 15 50. The process of claim 47, wherein the feed inlets are located within 10% of the points of symmetry of the loop reactor.
51. The process of claim 48, wherein the feed inlets are located within 10% of the points of symmetry of the loop reactor.
52. The process of claim 49, wherein the feed inlets are located at the points of symmetry of the loop reactor.
- 20 53. The process of claim 50, wherein the feed inlets are located at the points of symmetry of the loop reactor.
54. The process of claim 51, wherein the feed inlets are located at the points of symmetry of the loop reactor.
- 25 55. The process of claim 1, wherein the loop reactor has a length of at least 750 feet.
56. The process of claim 3, wherein the loop reactor has a length of at least 750 feet.
57. The process of claim 55, wherein the loop reactor has a length of at least 1,000 feet.
- 30 58. The process of claim 56, wherein the loop reactor has a length of at least 1,000 feet.

59. The process of claim 57, wherein the loop reactor has a length of at least 1,400 feet.
60. The process of claim 58, wherein the loop reactor has a length of at least 1,400 feet.
- 5 61. The process of claim 1, wherein the loop reactor has at least 6 legs.
62. The process of claim 3, wherein the loop reactor has at least 6 legs.
63. The process of claim 61, wherein the loop reactor has at least 8 legs.
64. The process of claim 62, wherein the loop reactor has at least 8 legs.
65. The process of claim 63, wherein the loop reactor has at least 12 legs.
- 10 66. The process of claim 64, wherein the loop reactor has at least 12 legs.
67. The process of claim 1, wherein the loop reactor has a volume of at least 10,000 gallons.
68. The process of claim 3, wherein the loop reactor has a volume of at least 10,000 gallons.
- 15 69. The process of claim 67, wherein the loop reactor has a volume of at least 20,000 gallons.
70. The process of claim 68, wherein the loop reactor has a volume of at least 20,000 gallons.
71. The process of claim 69, wherein the loop reactor has a volume of at least 35,000 gallons.
- 20 72. The process of claim 70, wherein the loop reactor has a volume of at least 35,000 gallons.
73. The process of claim 71, wherein the loop reactor has a volume of at least 40,000 gallons.
- 25 74. The process of claim 72, wherein the loop reactor has a volume of at least 40,000 gallons.
75. The process of claim 1, wherein the loop reactor has a length of at least 750 feet, at least 6 legs, and a volume of at least 10,000 gallons.
76. The process of claim 1, wherein the loop reactor has a length of at least 750 feet, at least 6 legs, and a volume of at least 10,000 gallons.
- 30 77. The process of claim 2, wherein the loop reactor has a length of at least 750 feet, at least 6 legs, and a volume of at least 10,000 gallons.

78. The process of claim 3, wherein the loop reactor has a length of at least 750 feet, at least 6 legs, and a volume of at least 10,000 gallons.
79. The process of claim 1, comprising operating the loop reactor in such a manner to maintain constant reaction kinetics within the reactor.
- 5 80. The process of claim 79, further comprising multiple feed inlets.
81. The process of claim 79, further comprising at least one circulator.
82. The process of claim 80, further comprising at least one circulator.
83. A process for producing polymer in a continuous slurry loop reactor comprising:
- 10 reacting a monomer in a hydrocarbon diluent to form a polymerization slurry of polymer solids in a liquid medium;
- discharging a portion of the polymerization slurry as slurry effluent which comprises a slurry of discharged polymer solids in a discharged liquid medium through at least two discharge conduits;
- 15 combining the effluent from at least two of the discharge conduits;
- flashing the combined effluent in a first flash to form a first flash vapor and a first flash slurry; and
- condensing at least a portion of the first flash vapor without compression.
84. The process of claim 83, wherein the discharge of slurry effluent through
- 20 at least one discharge conduit is continuous.
85. The process of claim 84, wherein the discharge of slurry effluent through at least two discharge conduits is continuous.
86. The process of claim 83, wherein the effluent from all discharge conduits is combined into a single transfer conduit.
- 25 87. The process of claim 84, wherein the effluent from all discharge conduits is combined into a single transfer conduit.
88. The process of claim 85, wherein the effluent from all discharge conduits is combined into a single transfer conduit.
89. The process of claim 83 further comprising feeding catalyst into the
- 30 reactor from multiple catalyst inlets in such a manner to maintain constant reaction kinetics.

90. The process of claim 84 further comprising feeding catalyst into the reactor from multiple catalyst inlets in such a manner to maintain constant reaction kinetics.
- 5 91. The process of claim 85 further comprising feeding catalyst into the reactor from multiple catalyst inlets in such a manner to maintain constant reaction kinetics.
92. The process of claim 89 further comprising at least one feed inlet for at least one of monomer, co-monomer, co-catalyst, diluent, polymer modifier, process additive, or mixtures thereof.
- 10 93. The process of claim 90 further comprising at least one feed inlet for at least one of monomer, co-monomer, co-catalyst, diluent, polymer modifier, process additive, or mixtures thereof.
94. The process of claim 91 further comprising at least one feed inlet for at least one of monomer, co-monomer, co-catalyst, diluent, polymer
15 modifier, process additive, or mixtures thereof.
95. The process of claim 92, comprising multiple feed inlets.
96. The process of claim 93, comprising multiple feed inlets.
97. The process of claim 94, comprising multiple feed inlets.
98. The process of claim 83, wherein the discharge conduits are located within
20 45% of the points of symmetry of the loop reactor.
99. The process of claim 84, wherein the discharge conduits are located within 45% of the points of symmetry of the loop reactor.
100. The process of claim 85, wherein the discharge conduits are located within 45% of the points of symmetry of the loop reactor.
- 25 101. The process of claim 98, wherein the discharge conduits are located within 25% of the points of symmetry of the loop reactor.
102. The process of claim 99, wherein the discharge conduits are located within 25% of the points of symmetry of the loop reactor.
103. The process of claim 100, wherein the discharge conduits are located
30 within 25% of the points of symmetry of the loop reactor.
104. The process of claim 101, wherein the discharge conduits are located within 10% of the points of symmetry of the loop reactor.

105. The process of claim 102, wherein the discharge conduits are located within 10% of the points of symmetry of the loop reactor.
106. The process of claim 103, wherein the discharge conduits are located within 10% of the points of symmetry of the loop reactor.
- 5 107. The process of claim 104, wherein the discharge conduits are located at the points of symmetry of the loop reactor.
108. The process of claim 105, wherein the discharge conduits are located at the points of symmetry of the loop reactor.
109. The process of claim 106, wherein the discharge conduits are located at the points of symmetry of the loop reactor.
- 10 110. The process of claim 92, wherein at least one discharge conduit is located in a bottom run of the loop reactor.
111. The process of claim 110, wherein the at least two discharge conduits are each located within a separate bottom run in the loop reactor.
- 15 112. The process of claim 93, wherein at least one discharge conduit is located in a bottom run of the loop reactor.
113. The process of claim 112, wherein the at least two discharge conduits are each located within a separate bottom run in the loop reactor.
114. The process of claim 110, wherein the bottom run is a 180° bend.
- 20 115. The process of claim 114, wherein at least one discharge conduit is located within 45° of the center of the 180° bend.
116. The process of claim 115, wherein at least one discharge conduit is located within 25° of the center of the 180° bend.
117. The process of claim 116, wherein at least one discharge conduit is located within 10° of the center of the 180° bend.
- 25 118. The process of claim 117, wherein at least one discharge conduit is located at the center of the 180° bend.
119. The process of claim 112, wherein the bottom run is a 180° bend.
120. The process of claim 119, wherein at least one discharge conduit is located within 45° of the center of the 180° bend.
- 30 121. The process of claim 120, wherein at least one discharge conduit is located within 25° of the center of the 180° bend.

-47-

122. The process of claim 121, wherein at least one discharge conduit is located within 10° of the center of the 180° bend.
123. The process of claim 122, wherein at least one discharge conduit is located at the center of the 180° bend.
- 5 124. The process of claim 92, wherein the loop reactor has a length of at least 750 feet.
125. The process of claim 93, wherein the loop reactor has a length of at least 750 feet.
126. The process of claim 124, wherein the loop reactor has a length of at least
10 1,000 feet.
127. The process of claim 125, wherein the loop reactor has a length of at least 1,000 feet.
128. The process of claim 126, wherein the loop reactor has a length of at least 1,400 feet.
- 15 129. The process of claim 127, wherein the loop reactor has a length of at least 1,400 feet.
130. The process of claim 92, wherein the loop reactor has at least 6 legs.
131. The process of claim 93, wherein the loop reactor has at least 6 legs.
132. The process of claim 130, wherein the loop reactor has at least 8 legs.
- 20 133. The process of claim 131, wherein the loop reactor has at least 8 legs.
134. The process of claim 132, wherein the loop reactor has at least 12 legs.
135. The process of claim 133, wherein the loop reactor has at least 12 legs.
136. The process of claim 92, wherein the loop reactor has a volume of at least 10,000 gallons.
- 25 137. The process of claim 93, wherein the loop reactor has a volume of at least 10,000 gallons.
138. The process of claim 136, wherein the loop reactor has a volume of at least 20,000 gallons.
139. The process of claim 137, wherein the loop reactor has a volume of at least
30 20,000 gallons.
140. The process of claim 138, wherein the loop reactor has a volume of at least 35,000 gallons.

141. The process of claim 139, wherein the loop reactor has a volume of at least 35,000 gallons.
142. The process of claim 140, wherein the loop reactor has a volume of at least 40,000 gallons.
- 5 143. The process of claim 141, wherein the loop reactor has a volume of at least 40,000 gallons.
144. The process of claim 92, wherein the loop reactor has a length of at least 750 feet, at least 6 legs, and a volume of at least 10,000 gallons.
145. The process of claim 93, wherein the loop reactor has a length of at least
10 750 feet, at least 6 legs, and a volume of at least 10,000 gallons.
146. A process for producing polymer in a continuous slurry loop reactor, wherein the reactor has a length of greater than 1,350 feet.
147. The process of claim 146, wherein the reactor has a length of greater than 1,400 feet.
- 15 148. The process of claim 147, wherein the reactor has a length of greater than 1,450 feet.
149. A process for producing polymer in a continuous slurry loop reactor, wherein the reactor has greater than 8 legs.
150. The process of claim 149, wherein the reactor has greater than 10 legs.
- 20 151. The process of claim 150, wherein the reactor has greater than 12 legs.
152. The process of claim 149, wherein the difference of reactant monomer concentrations, measured in wt. %, taken at any two points along the loop reactor, is within 20% of the higher value.
153. The process of claim 152 wherein the difference of reactant monomer
25 concentrations, measured in wt. %, taken at any two points along the loop reactor, is within 10% of the higher value.
154. The process of claim 153, wherein the difference of reactant monomer concentrations, measured in wt. %, taken at any two points along the loop reactor, is within 5% of the higher value.
- 30 155. The process of claim 150, wherein the difference of reactant monomer concentrations, measured in wt. %, taken at any two points along the loop reactor, is within 20% of the higher value.

156. The process of claim 155, wherein the difference of reactant monomer concentrations, measured in wt. %, taken at any two points along the loop reactor, is within 10% of the higher value.
157. The process of claim 156, wherein the difference of reactant monomer concentrations, measured in wt. %, taken at any two points along the loop reactor, is within 5% of the higher value.
158. The process of claim 151, wherein the difference of reactant monomer concentrations, measured in wt. %, taken at any two points along the loop reactor, is within 20% of the higher value.
159. The process of claim 158, wherein the difference of reactant monomer concentrations, measured in wt. %, taken at any two points along the loop reactor, is within 10% of the higher value.
160. The process of claim 159, wherein the difference of reactant monomer concentrations, measured in wt. %, taken at any two points along the loop reactor, is within 5% of the higher value.
161. A process for producing polymer in a continuous slurry loop reactor comprising feeding catalyst into the reactor from multiple catalyst inlets; wherein the process further comprises:
multiple feed inlets for at least one of monomer, co-monomer, co-catalyst, diluent, polymer modifier, process additive, or mixtures thereof;
at least one circulator in the reactor and the circulator comprises a pump and/or a motor driven device to increase the pressure of the circulating slurry in the loop reactor;
at least one catalyst inlet and the at least one feed inlet are located at the suction end and discharge end, respectively, of a circulator; and wherein:
the catalyst inlets are located within 10% of the points of symmetry of the loop reactor;
the circulators are located within 10% of the points of symmetry of the loop reactor;
the feed inlets are located within 10% of the points of symmetry of the loop reactor;
the loop reactor has a length of at least 750 feet;

-50-

the loop reactor has at least 6 legs; and
the loop reactor has a volume of at least 10,000 gallons.

162. A process for producing polymer in a continuous slurry loop reactor comprising:
- 5 feeding catalyst into the reactor from multiple catalyst inlets in such a manner to maintain constant reaction kinetics;
reacting a monomer in a hydrocarbon diluent to form a polymerization slurry of polymer solids in a liquid medium;
discharging a portion of the polymerization slurry as slurry effluent which
10 comprises a slurry of discharged polymer solids in a discharged liquid medium through at least two discharge conduits;
combining the effluent from at least two of the discharge conduits;
flashing the combined effluent in a first flash to form a first flash vapor and a first flash slurry; and
15 condensing at least a portion of the first flash vapor without compression;
wherein:
the discharge of slurry effluent through at least two discharge conduit is continuous;
the effluent from all discharge conduits is combined into a single transfer
20 conduit;
multiple feed inlets for at least one of monomer, co-monomer, co-catalyst, diluent, polymer modifier, process additive, or mixtures thereof;
the discharge conduits are located within 10% of the points of symmetry of the loop reactor;
25 at least one discharge conduit is located in a bottom run of the loop reactor;
the loop reactor has a length of at least 750 feet;
the loop reactor has at least 6 legs; and
the loop reactor has a volume of at least 10,000 gallons.
- 30 163. A slurry loop reactor comprising
multiple catalyst inlets; at least one feed inlet; at least one discharge conduit; and at least one circulator in the reactor;

wherein the catalyst inlets are located within 45% of the points of symmetry of the loop reactor.

164. The slurry loop reactor of claim 163 further comprising
at least one 180° bend as a bottom run of the loop reactor; wherein a
5 discharge conduit is located within said bend.
165. The slurry loop reactor of claim 164, wherein the catalyst inlets and feed
inlets are located within 25% of the points of symmetry of the loop reactor.
166. The slurry loop reactor of claim 165, wherein the catalyst inlets and feed
inlets are located at the points of symmetry of the loop reactor.
- 10 167. The slurry loop reactor of claim 163 comprising at least two discharge
conduits.
168. The slurry loop reactor of claim 167, wherein the at least two discharge
conduits are located within 45% of the points of symmetry of the loop
reactor.
- 15 169. The slurry loop reactor of claim 168, wherein the at least two discharge
conduits are located within 25% of the points of symmetry of the loop
reactor.
170. The slurry loop reactor of claim 169, wherein at least one discharge
conduit is located within 45° of the center of the 180° bend.
- 20 171. The slurry loop reactor of claim 170, wherein the at least one discharge
conduit is located within 25° of the center of the 180° bend.
172. The slurry loop reactor of claim 171, wherein the at least one discharge
conduit is located within 10° of the center of the 180° bend.
173. The slurry loop reactor of claim 172, wherein the at least one discharge
25 conduit is located at the center of the 180° bends.
174. The slurry loop reactor of claim 164, wherein at least two discharge
conduits are located within a separate bottom run in the loop reactor.

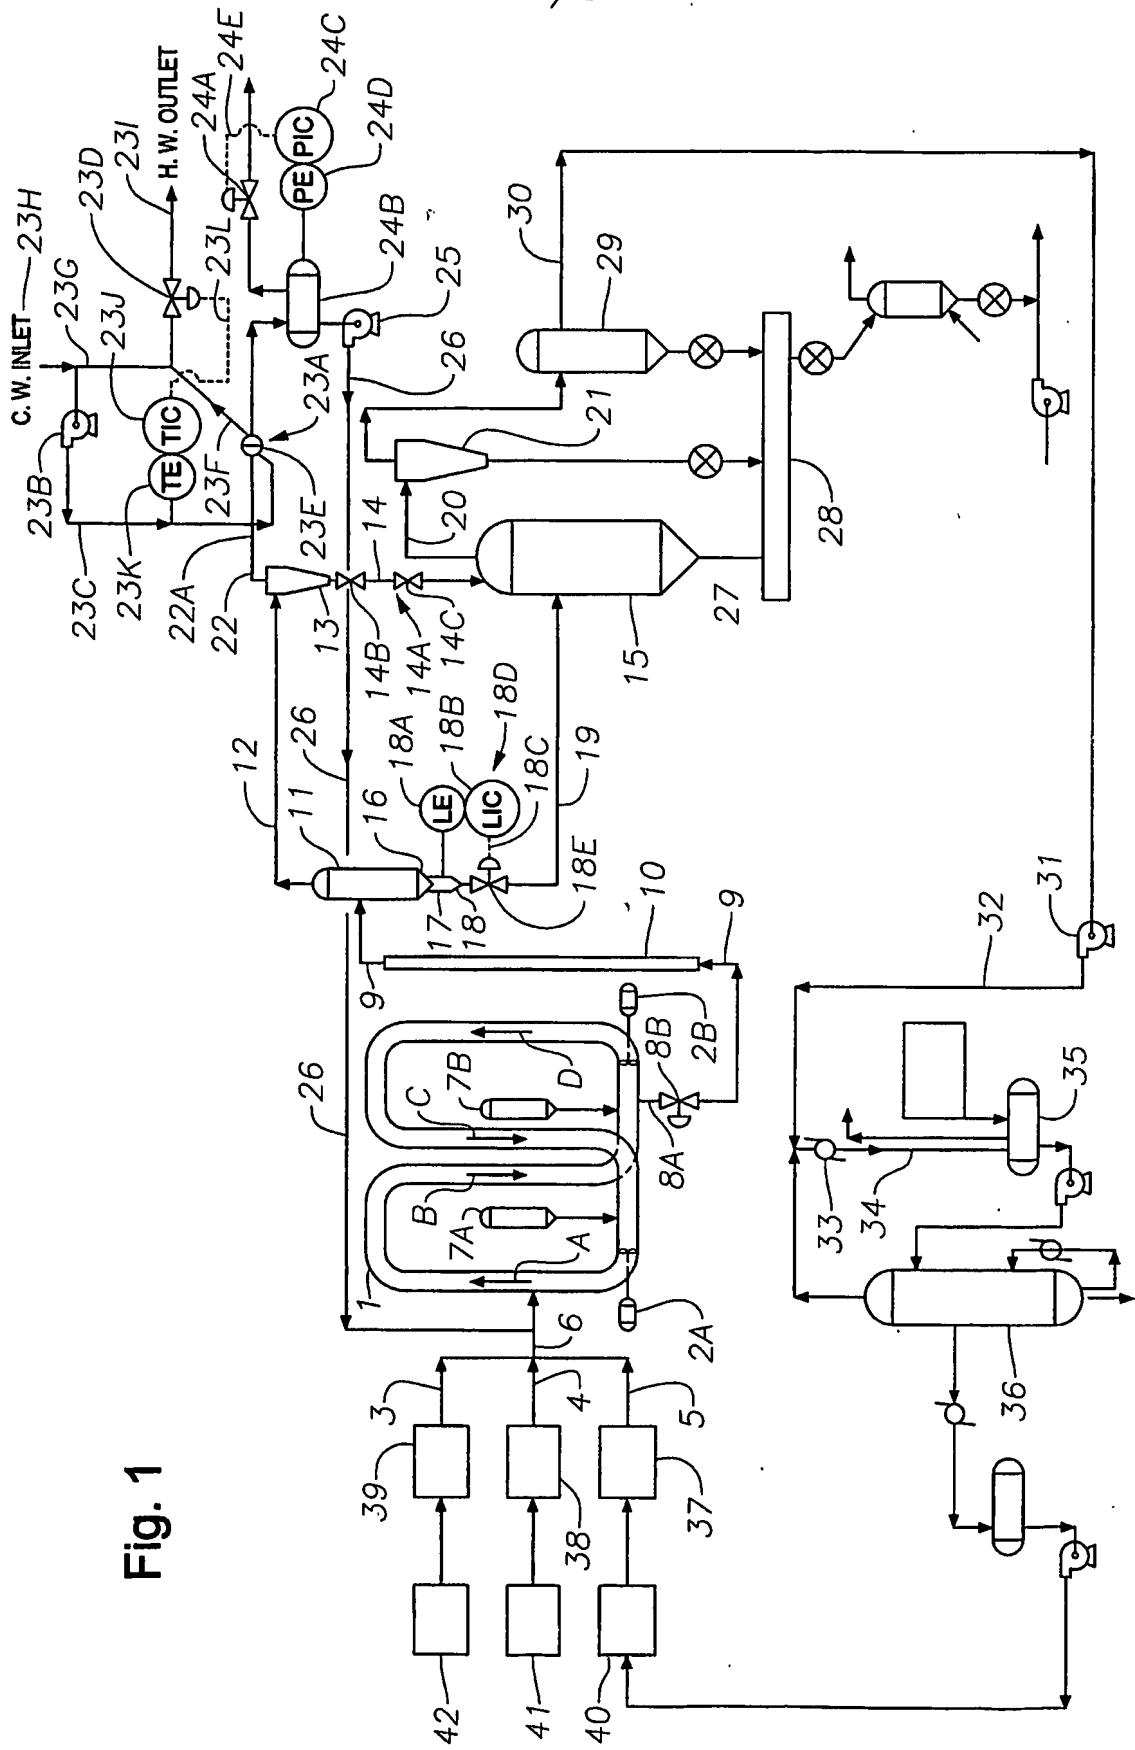


Fig. 1

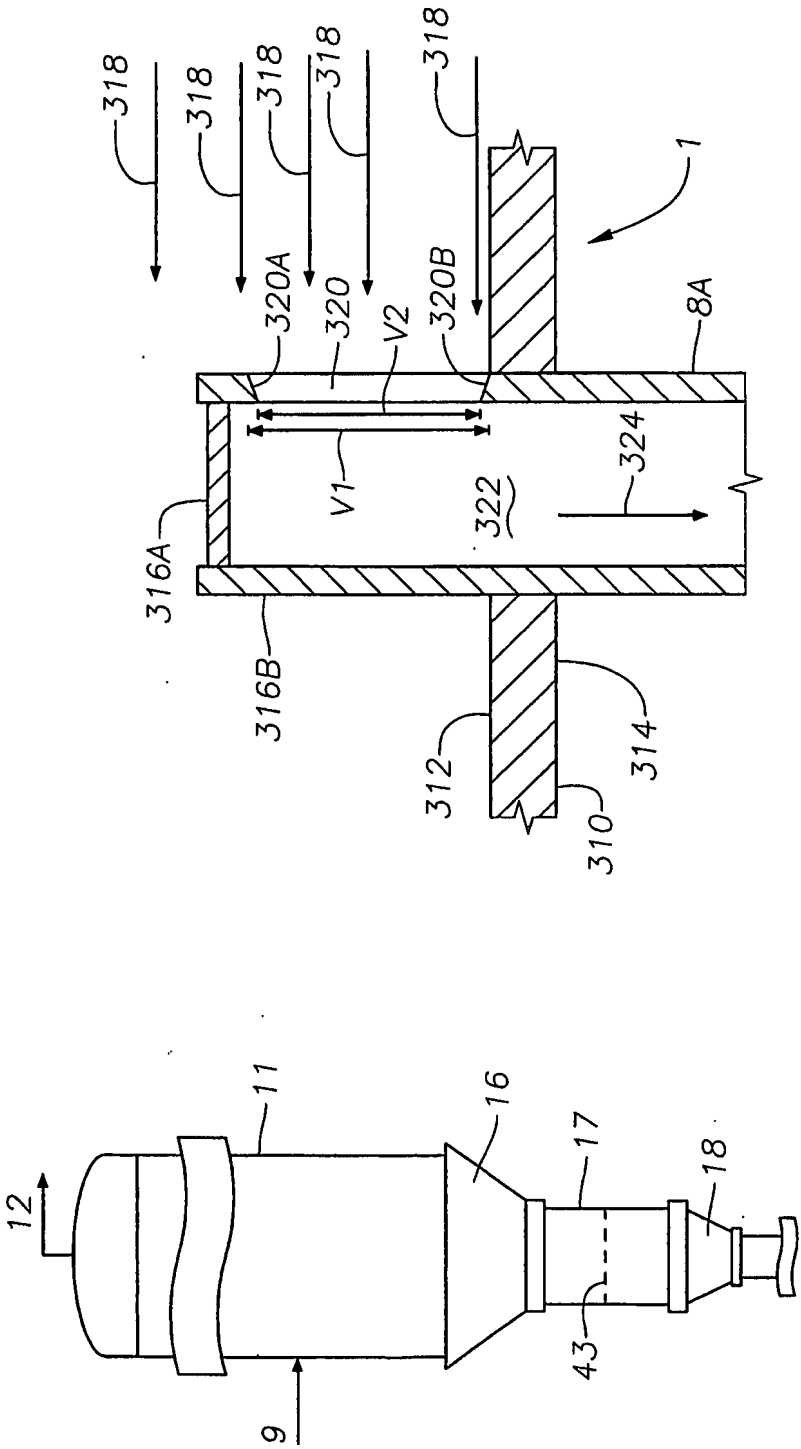


Fig. 3

Fig. 2

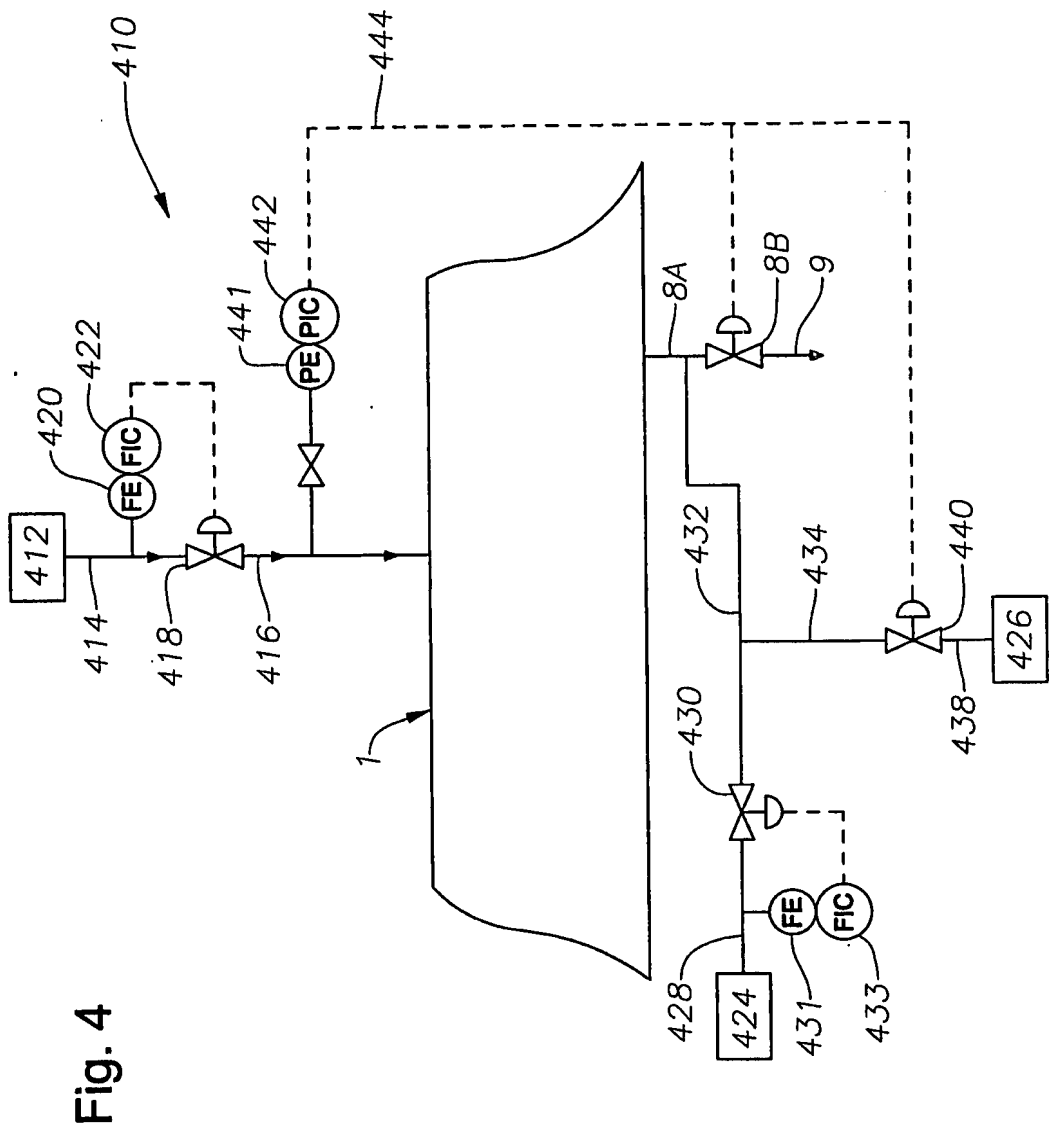


Fig. 6

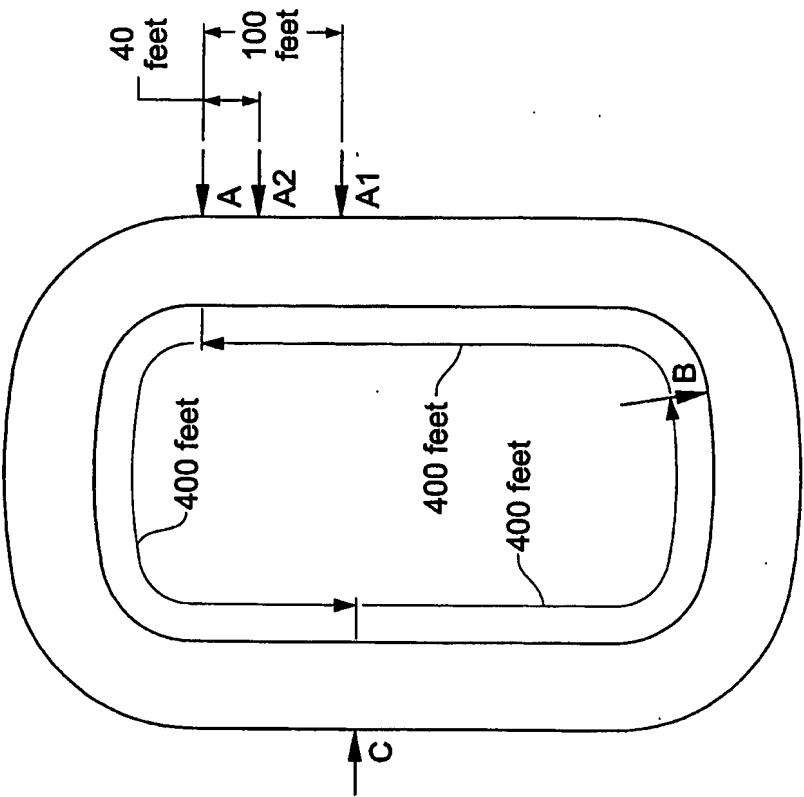
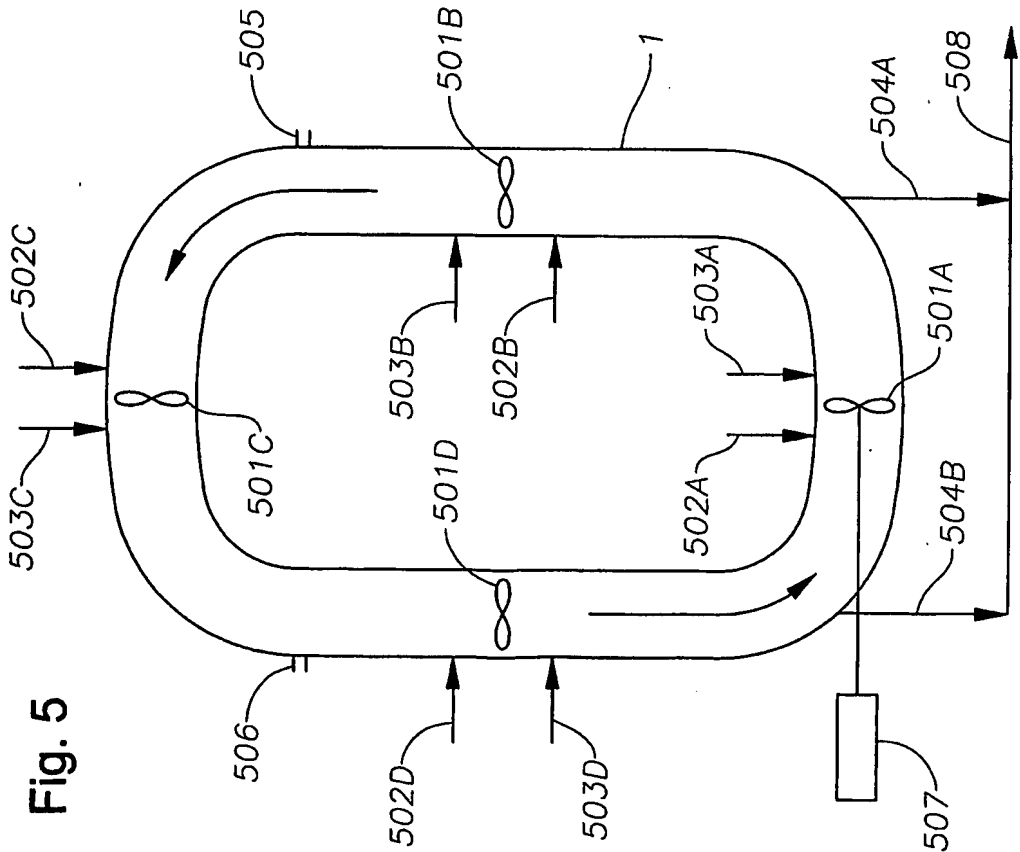


Fig. 5



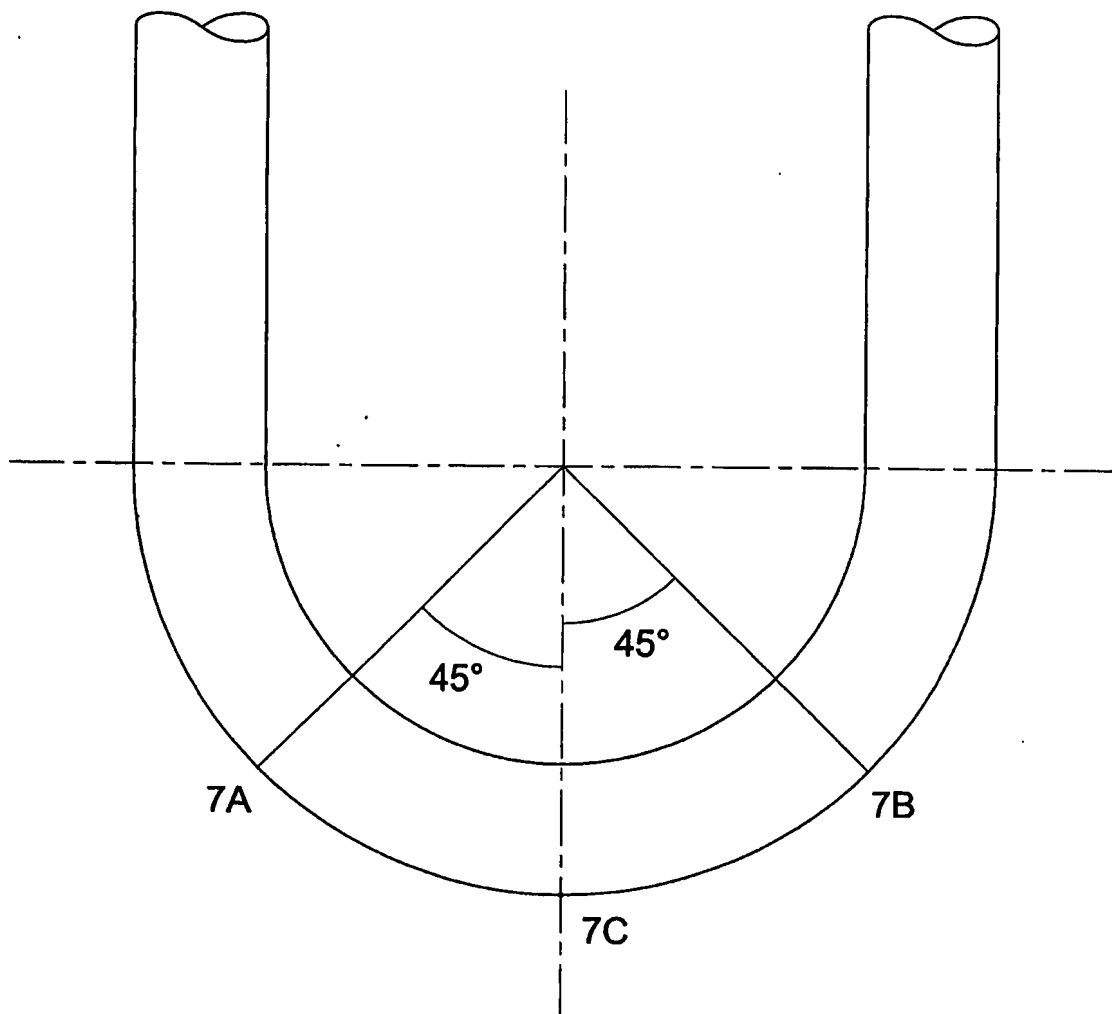


Fig. 7

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 02/04519

A. CLASSIFICATION OF SUBJECT MATTER
 IPC 7 B01J19/18 B01J19/24 C08F2/01

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 B01J C08F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 99 60028 A (EXXON CHEMICAL PATENTS INC) 25 November 1999 (1999-11-25) abstract; figure 1 page 13, line 5 - line 8 ---	1
X	WO 97 36942 A (CAMP GARY A ;COMBS R BRUCE (US); KAO CHE I (US); STULTZ JEFF H (US) 9 October 1997 (1997-10-09) abstract; claim 1; figure 1 page 20, line 3 - line 9 page 21, line 4 - line 5 ---	1
X	US 3 262 922 A (PAYNE WILLIAM E) 26 July 1966 (1966-07-26) column 3, line 15 - line 25; figure 1 --- -/--	1

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

22 August 2002

Date of mailing of the international search report

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
 NL - 2280 HV Rijswijk
 Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
 Fax: (+31-70) 340-3018

Authorized officer

Thomasson, P

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 02/04519

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	<p>PATENT ABSTRACTS OF JAPAN vol. 011, no. 192 (C-429), 19 June 1987 (1987-06-19) & JP 62 013408 A (IDEMITSU PETROCHEM CO LTD), 22 January 1987 (1987-01-22) abstract; figure 1 -----</p>	1

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US 02/04519

Box I Observations where certain claims were found unsearchable (Continuation of Item 1 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☒ Claims Nos.: 2-82, 146-148, 161, 163-174
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:
see FURTHER INFORMATION sheet PCT/ISA/210
3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box II Observations where unity of invention is lacking (Continuation of Item 2 of first sheet)

This International Searching Authority found multiple inventions in this International application, as follows:

see additional sheet

1. ☐ As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☒ No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:
1-82, 146-148, 161, 163-174

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
- ☐ No protest accompanied the payment of additional search fees.

FURTHER INFORMATION CONTINUED FROM PCT/ISA 210

Continuation of Box I.2

Claims Nos.: 2-82, 146-148, 161, 163-174

The attention of the applicant is drawn to the following points:

The set of claims 1-82, 146-148, 161 and 163-174 contain 4 independent claims which respectively indicate different subject-matter. Claim 1 indicates a process solely characterized by some multiple catalyst inlets; claim 146 indicates a process solely characterized by the length of the reactor; claim 161 indicates a process furthermore characterized by a certain location of some catalyst inlets, circulators and feed inlets and characterized by the length, the volume and the number of legs of the reactor used and finally claim 163 indicates a loop reactor characterized by some multiple catalyst inlets and their position within the loop reactor. Consequently it is not clear which is the invention claimed (is it solely a reactor of at least 1,350 feet, see claim 146, or a reactor with solely some multiple catalyst inlets, see claim 1, or is the number of the legs of the reactor also essential to the definition of the invention, see claim 161...?).

Therefore claims 1-82, 146-148, 161 and 163-174 lack clarity and conciseness and it is not clear from this set of claims which are the technical features essential to the definition of the invention (these technical features would be normally the subject-matter to be searched); it is impossible to determine the matter for which protection is sought; the present application fails to comply with the clarity and conciseness requirements of Article 6 PCT (see also Rule 6.1(a) PCT) to such an extent that a meaningful search is impossible.

Furthermore the description of the present application on page 12, lines 24-28 discloses that "the claimed apparatus and process provide several advantages over the prior art including: (1) allowing for a continuous processing of the contents of a slurry reactor from the point of discharge of the polymerization slurry effluent through a discharge valve; a first flash tank; a seal chamber; a seal chamber exit reducer; and therefrom to a second flash tank,...". The attention of the applicant is drawn to the fact that none of the claims 1-82, 146-148, 161 and 163-174 contains any of a first flash tank, a seal chamber, a chamber exit reducer and/or a second flash tank. These strong discrepancies between the claims and the description (Article 6 PCT) make also impossible to determine the matter for which protection is sought.

Consequently only independent claim 1 was searched.

The applicant's attention is drawn to the fact that claims, or parts of claims, relating to inventions in respect of which no international search report has been established need not be the subject of an international preliminary examination (Rule 66.1(e) PCT). The applicant is advised that the EPO policy when acting as an International Preliminary Examining Authority is normally not to carry out a preliminary examination on matter which has not been searched. This is the case irrespective of whether or not the claims are amended following receipt of the search report or during any Chapter II procedure.

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

This International Searching Authority found multiple (groups of) inventions in this international application, as follows:

1. Claims: 1-82, 146-148, 161, 163-174

1.1. Claims: 1-82, 161, 163-174

A process for producing a polymer in a continuous slurry loop reactor, and a corresponding slurry loop reactor, comprising the feeding of the catalyst into the reactor from multiple catalyst inlets.

1.2. Claims: 146-148

A process for producing a polymer in a continuous slurry loop reactor, wherein the reactor has a length of greater than 1,350 feet.

2. Claims: 83-145, 162

A process for producing a polymer in a continuous slurry loop reactor comprising the step of discharging the polymerisation slurry through at least two discharge conduits, combining the two discharged effluents and flashing the combined effluents.

3. Claims: 149-160

A process for producing a polymer in a continuous slurry loop reactor having more than 8 legs wherein the difference of reactant monomer along the loop reactor is within a defined value.

Please note that all inventions mentioned under item 1, although not necessarily linked by a common inventive concept, could be searched without effort justifying an additional fee.

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 02/04519

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 9960028	A	25-11-1999	AU 747914 B2	30-05-2002
			AU 3194699 A	11-10-1999
			AU 4085899 A	06-12-1999
			BR 9908487 A	05-12-2000
			CA 2321825 A1	23-09-1999
			CA 2330967 A1	25-11-1999
			CN 1293592 T	02-05-2001
			CN 1302225 T	04-07-2001
			EA 2729 B1	29-08-2002
			EP 1064086 A1	03-01-2001
			EP 1080116 A2	07-03-2001
			JP 2002506718 T	05-03-2002
			WO 9947251 A1	23-09-1999
			WO 9960028 A2	25-11-1999
			US 6319997 B1	20-11-2001
			US 2002132936 A1	19-09-2002
			US 2002111441 A1	15-08-2002

WO 9736942	A	09-10-1997	AT 210688 T	15-12-2001
			AU 714023 B2	16-12-1999
			AU 2433297 A	22-10-1997
			BR 9708493 A	03-08-1999
			CA 2250763 A1	09-10-1997
			CN 1219178 A	09-06-1999
			CZ 9803164 A3	12-05-1999
			DE 69709076 D1	24-01-2002
			EP 0891381 A1	20-01-1999
			ES 2165049 T3	01-03-2002
			HU 9901742 A2	30-08-1999
			JP 3334082 B2	15-10-2002
			JP 2000507634 T	20-06-2000
			KR 2000005193 A	25-01-2000
			PL 329192 A1	15-03-1999
			TR 9801973 T2	21-12-1998
			WO 9736942 A1	09-10-1997
			DE 69709076 T2	02-05-2002
			US 5977251 A	02-11-1999

US 3262922	A	26-07-1966	BE 643534 A	07-08-1964
			DE 1520592 A1	05-07-1973
			FR 1386677 A	22-01-1965
			GB 1000097 A	04-08-1965

JP 62013408	A	22-01-1987	JP 1891434 C	07-12-1994
			JP 6018822 B	16-03-1994
